

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
22 September 2005 (22.09.2005)

PCT

(10) International Publication Number  
**WO 2005/087299 A1**

(51) International Patent Classification<sup>7</sup>: **A61M 15/00**

(21) International Application Number:  
PCT/GB2005/000926

(22) International Filing Date: 10 March 2005 (10.03.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0405397.1 10 March 2004 (10.03.2004) GB  
0420538.1 15 September 2004 (15.09.2004) GB

(71) Applicant (for all designated States except US): **GLAXO GROUP LIMITED** [GB/GB]; Glaxo Wellcome House, Berkeley Avenue, Greenford Middlesex UB6 0NN (GB).


(72) Inventors; and

(75) Inventors/Applicants (for US only): **ANDERSON, Gregor, John, McLennan** [GB/GB]; GlaxoSmithKline, Park

Road, Ware, Hertfordshire SG12 ODP (GB). **BRAND, Peter, John** [GB/GB]; GlaxoSmithKline, Park Road, Ware, Hertfordshire SG12 ODP (GB). **COX, Mark, Anthony** [GB/GB]; GlaxoSmithKline, Park Road, Ware, Hertfordshire SG12 ODP (GB). **CUDE, Ian** [GB/GB]; GlaxoSmithKline, Park Road, Ware Hertfordshire SG12 ODP, Hertfordshire SG12 ODP (GB). **FARR, Philip, William** [GB/GB]; GlaxoSmithKline, Park Road, Ware, Hertfordshire SG12 ODP (GB). **KELLY, Andrew, Michael** [GB/GB]; GlaxoSmithKline, Park Road, Ware, Hertfordshire SG12 ODP (GB). **LINTELL, Daniel, Thomas, De Sausmarez** [GB/GB]; GlaxoSmithKline, Park Road, Ware, Hertfordshire SG12 ODP (GB). **PEARSON, Allen, John** [GB/GB]; Origin Product Design Limited, Unit 1, Broughton Craft Centre, Causeway Road, Broughton, Huntingdon Cambridgeshire PE28 3AS (GB). **RAND, Paul, Kenneth** [GB/GB]; GlaxoSmithKline, Park Road, Ware, Hertfordshire SG12 ODP (GB).

[Continued on next page]

(54) Title: A DISPENSING DEVICE

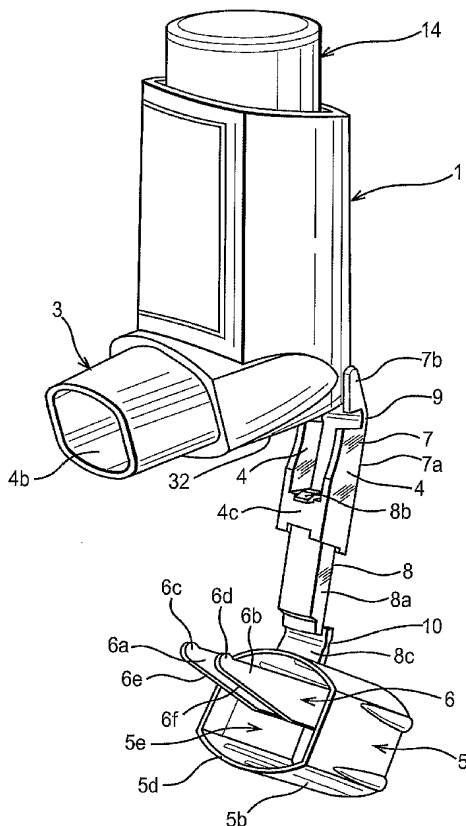

(57) Abstract: An inhaler is provided with a restricting member (6) to prevent unintentional actuation of the inhaler. Also provided is an inhaler with an extensible strap (2) joining a dust cap (5) to the housing (1) of an inhaler, the strap being particularly suited for use with inhalers that comprise a restricting member. The inhaler is useful, for example, in the treatment of asthma.

WO 2005/087299 A1



(74) **Agent:** MCKINNELL, Denise; GlaxoSmithKline, Corporate Intellectual Property (CN925.1), 980 Great West Road, Brentford Middlesex TW8 9GS (GB).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

#### Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)
- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)
- of inventorship (Rule 4.17(iv)) for US only

#### Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

## **A DISPENSING DEVICE**

### **RELATED APPLICATIONS**

5           This patent application claims priority from UK patent application Nos. 0 405 397.1 and 0 420 538.1 respectively filed on 10 March 2004 and 15 September 2004, the entire contents of each of which are incorporated herein by reference.

### 10 **FIELD OF THE INVENTION**

          The present invention relates to a dispensing device for dispensing a substance, and is particularly, but not exclusively, concerned with a medicament dispenser from which a medicament formulation is dispensable. The invention also relates to a closure and to an accessory for  
15 a dispensing device, for instance a medicament dispenser.

          An example of a medicament dispenser to which the invention is particularly, but not exclusively, concerned is an inhaler, for instance a  
20 pressurised metered dose inhaler (hereinafter referred to as a "pMDI"). The invention does, however, embrace other inhaler types, for example a dry powder inhaler (DPI), as will be appreciated by the reader skilled in the inhaler art.

### 25 **BACKGROUND OF THE INVENTION**

          pMDIs are well known in the art of inhalation devices. It is therefore not necessary to describe the construction and operation of a pMDI other than in bare essentials.

30

          A pMDI comprises a canister unit and a housing. The housing is generally tubular, although this is not essential, and generally formed of a

plastics material, for instance by moulding. The canister unit comprises an open-ended canister, typically made from a metal such as aluminium. The open end of the canister is sealingly capped by a metering valve assembly. The valve assembly includes a hollow dispensing member or valve stem  
5 which projects from the outlet or business end of the canister. The dispensing member is mounted for sliding movement relative to the canister between an extended position, to which the dispensing member is biased by a biasing mechanism in the valve assembly, and a depressed position.

10

In use, the sealed canister contains a pressurised medicinal aerosol formulation. The formulation comprises the medicament and a fluid propellant, and optionally one or more excipients and/or adjuvants. The medicament is typically in solution or suspension in the formulation. The  
15 propellant is typically a CFC-free propellant, suitably a liquid propellant, and may for example be HFA-134a or HFA-227.

Movement of the dispensing member from the extended position to the depressed position results in a metered dose of the aerosol formulation  
20 being dispensed from the canister through the dispensing member. Typically, the metering valve assembly is provided with a metering chamber of defined volume. In the extended position of the dispensing member, the content of the canister is placed in fluid communication with the metering chamber through the dispensing member so that the metering  
25 chamber is filled with the aerosol formulation. When the dispensing member is depressed, the metering chamber is isolated from the canister inner volume and placed in fluid communication with the external environment through the dispensing member. Thus, the defined volume of the aerosol formulation in the metering chamber is discharged to the  
30 external environment via the dispensing member.

Such metering valve assemblies are well known in the art and can be obtained from *inter alia* Bepak Plc (King's Lynn, Norfolk, United Kingdom) and Valois S.A.S. (Le Neubourg, France).

5       The housing comprises an internal passageway having an open end. The canister unit is slidable into the internal passageway through the open end with the canister unit being inserted valve assembly first into the internal passageway. A stem block, which receives the dispensing member of the canister when the canister unit is received in the housing in a "rest  
10 position", has a passageway with an inlet end for receiving the dispensing member and an outlet end, which faces a dispensing outlet of the housing, typically a mouthpiece or a nasal nozzle. The stem block holds the dispensing member stationary whereby depression of the canister unit from its rest position further into the housing to an "actuated position" causes  
15 the dispensing member to be displaced from the extended position to the depressed position relative to the canister. A metered dose of the aerosol formulation will thereby be dispensed out of the dispensing outlet of the housing via the internal passageway of the stem block.

20       In use, a patient in need of a metered dose of the medicinal aerosol formulation concurrently inhales on the dispensing outlet and depresses the canister unit from the rest position to the actuated position. The inspiratory airflow produced by the patient entrains the metered dose of the medicinal aerosol formulation into the patient's respiratory tract.

25

Inhalers are commonly provided with a dust cap that covers the dispensing outlet when the inhaler is not in use. The dust cap, when applied, prevents foreign material from entering the housing. This prevents the user from inhaling dust or lint, for example, that might otherwise  
30 accumulate in the housing. This is of particular importance where the user suffers from asthma or other respiratory conditions, in which the inhalation of foreign material may cause severe irritation.

Developments to pMDIs have included the provision of actuation indicators or dose counters therefor. Such a dose counter is described in PCT Patent Application Nos. WO-A-9856444 and WO-A-2004/001664 to  
5 Glaxo Group Limited. The pMDI canister unit may comprise the dose counter, which is fixably secured on the valve assembly end of the canister and includes a display which denotes the number of metered doses of the medicament formulation dispensed from, or remaining in, the canister. The display of the dose counter is visible to the patient through a window  
10 provided in the housing. The display may be presented by a plurality of indicator wheels rotatably mounted on a common axle, each wheel having numerals from '0' to '9' displayed in series around the circumference.

pMDI devices, however, are susceptible to unintentional actuation,  
15 particularly whilst in transit, for example shipment between the manufacturer and distributor. During such transit, such devices and their packaging are often subjected to impacts and sudden movements. Such forces can actuate the pMDI, causing doses of the formulation to be dispensed. When the pMDI includes a dose counter, rough handling in  
20 transit can cause the value displayed to the user by the counter to increase or decrease so that it is not consistent with the number of doses that have been dispensed by, or remain in, the pMDI. It is wasteful to dispense unwanted doses of the medicament, and potentially very dangerous for a dose counter to indicate to the user that more doses remain in the canister  
25 than are actually present.

It is therefore desirable to provide a pMDI that is adapted to prevent unintentional actuation. It is also desirable to provide a pMDI with a dose counter which is adapted to prevent miscounting actuations in the event of  
30 an impact.

A multiple-dose DPI with means of preventing unintentional actuation is marketed under the trademark Easyhaler (RTM), the basic inhaler construction being illustrated in WO-A-01/87391 (Orion Corporation). The Easyhaler (RTM) inhaler dispenses a powdered medicament when a dosing member is moved, relative to the body of the inhaler, towards a metering drum. This movement causes the drum to rotate, dispensing a single metered dose of the powdered medicament from a powder reservoir at an inhaler mouthpiece for entrainment in the inhalation airflow of a user inhaling thereat, and driving a dose counting mechanism. The inhaler also comprises a small hole through the body of the inhaler, situated above the mouthpiece. A cap is provided, to cover the mouthpiece when not in use, comprising a prong that protrudes through the hole and into the body of the inhaler when the cap is engaged by the mouthpiece. The presence of the prong inside the body of the inhaler restricts the motion of the dosing member in the direction of the drum, preventing the user from dispensing powder by pressing down on the dosing member while the cap is engaged.

There are, however, a number of disadvantages with the Easyhaler (RTM) inhaler. Should moisture enter the inhaler, the powder will agglomerate to form lumps that cannot enter the metering drum, thus affecting the dosage. Also, the interior surface of the mouthpiece is likely to become moist during use, causing the powdered medicament to stick to its interior surface.

25

Both DPIs and pMDIs mix a medicament with an air stream that is drawn through the device by the user's inhalation and the profile of the inhalation airflow within the housing of the inhaler is therefore important to product performance, for instance the fine particle mass (fpm) or respirable fraction of the emitted dose, as will be well understood by the skilled reader in the inhaler art. Providing a hole in the housing, as in the Easyhaler (RTM) device, alters the inhalation airflow profile through the device.

Therefore, if an existing inhaler design is adapted to include a prong and hole arrangement, it would require re-testing for regulatory approval. This re-testing delays production and involves additional expense.

- 5           Consequently, it would be advantageous to provide a means for preventing accidental actuation of the inhaler without altering the inhalation airflow profile through the housing.

Another problem with the prior art Easyhaler (RTM) inhaler is that an  
10 adapted cap, provided with a prong, can only be used with inhalers that have been specially provided with a hole above the mouthpiece. The effect of this is that the cap is not reverse-compatible with previously manufactured housings and that the manufacture of the housing needs to be updated.

15           Some prior art inhalers comprise a strap that is used to secure the dust cap to the housing. This is particularly so of inhalers produced for the US market, where dust caps are required to be attached to the housing. Prior art straps commonly comprise an otherwise rigid plastic strip that can  
20 be flexed only at fold-lines provided close to points of attachment to the back of the housing and the dust cap, located at opposite ends of the strap. The roof of the dust cap comprises only a narrow lip and the sides cut away accordingly. In applying the dust cap, the user brings the strap along the bottom of the housing, using the flexibility in the fold lines, and forces the  
25 lip over the roof of the dispensing outlet to engage it.

There are a number of problems with this strap. The first is that the lip of the dust cap requires the application of some force to engage it with the housing. Consequently, the dust cap may be difficult for people with  
30 weak fingers, for example the arthritic, to apply and remove. A second problem is that continual folding weakens the fold lines in the strap, which may break after a large number of folding actions.



An additional problem is present in those inhalers that comprise a prong attached to the dust cap. In order to enter the housing, the prong must be inserted in a particular orientation. The prior art strap and cap arrangements, discussed above, require the cap to be rotated, about a fold line, into position when it is applied. Accordingly, if the cap is to comprise a prong which must engage, for example, a hole in the housing, the sweeping motion of the prong as the cap rotates would present a problem.

10 It is therefore desirable to provide an inhaler with means of attaching a dust cap to the dispensing outlet that, whilst being secure when attached, is easy to apply and remove and does not limit the use of a prong, or similar restricting means, to prevent inadvertent actuation of the inhaler.

15 Other aims of the invention will be understood by what now follows.

#### SUMMARY OF THE INVENTION

One aspect of the present invention provides an inhaler for use with  
20 a container unit containing a medicament formulation to be dispensed, comprising a housing in which the container unit is relatively movable thereto to cause dispensing of a dose, preferably a metered dose, of the medicament formulation from the container unit for inhalation by a user through a dispensing outlet of the housing; a closure positionable to close  
25 the dispensing outlet; and a restricting member, provided on the closure, movable between a first position which enables relative movement between the container unit and the housing for dispensing of the dose of the medicament formulation, and a second position in which the restricting member restricts relative movement between the container unit and the  
30 housing such that dispensing of the dose of the medicament formulation is prevented; wherein when the closure is positioned to close the dispensing

outlet, the restricting member enters the housing through the dispensing outlet to be disposed in its second position.

This aspect of the invention, and others herein disclosed, is particularly advantageous since a prior art housing may be used. This reverse-compatibility is advantageous for the user, who can fit a closure (e.g. a dust cap) with a restricting member to an existing inhaler that he already owns, to the manufacturer, who is not required to change his manufacturing process for the housing, and also for the marketer, who will not need to seek new regulatory approval for an adapted housing.

In an embodiment of the invention, such as one hereinafter to be described, the container unit is a pressurised canister unit, optionally including a dose counter, for instance mounted at the leading end of the canister unit.

In an embodiment of the invention, such as one hereinafter to be described, the restricting member is configured as a clip that engages a surface of the housing and/or container unit, suitably the stem block and/or a step in the housing. This is advantageous since it secures the closure to the housing whilst the inhaler is not in use. Moreover, it secures the restricting member in its second position. In an embodiment of the invention, such as one hereinafter to be described, the clip configuration of the restricting member is such that, if the container unit is moved in its dispensing direction relative to the housing, it causes the gripping force of the restricting member to increase ensuring that the closure is not ejected and dispensing does not occur.

In another aspect of the invention there is provided an inhaler comprising a housing having a dispensing outlet and a closure for closing the dispensing outlet which comprises an extendible connector part for connecting the closure to the housing.

Attaching the closure to the housing is a regulatory requirement in the United States and is in any case beneficial since it prevents loss of the closure or swallowing of it by the user. A particular advantage of an  
5 extensible connector (e.g. a strap) is that it reduces the force required to engage and disengage the closure. This is particularly important since many users of inhalers are elderly or infirm and may have weak fingers.

Optionally, the closure may comprise a restricting member. The  
10 presence of a restricting member is in itself desirable, as discussed above, and the connector comprised by the present invention is particularly suited to use with closures that comprise a restricting member and that must therefore be spaced sufficiently in front of the housing dispensing outlet that the restricting member can be correctly orientated before the cap is  
15 engaged.

In another possible embodiment, the restricting member is attached to the connector.

20 In an embodiment of the invention, such as one hereinafter to be described, the connector is telescopic and may comprise a first component attached to the housing and a second component attached to the closure, wherein the components are slidingly movable relative to each other between a contracted position, wherein the closure closes the dispensing  
25 outlet, and an extended position, wherein the closure is spaced from the dispensing outlet. The two components may be connected using a pin on one component that is held captive within a slot in the other component. At least one of the components may comprise hinging means, for example a fold line. Additionally, raised edges may be provided on one of the  
30 components, to substantially prevent relative rotational movement of the components.

In another possible embodiment, the connector may be a strap, and this strap may be made of a flexible and elastically stretchable material, for example knitted elastic, and is stretchable between a contracted state, wherein the closure can be engaged by the dispensing outlet, and an  
5 extended state, wherein the closure can be disengaged from the dispensing outlet.

In another possible embodiment, the connector comprises a sliding hinge joining the closure to the housing such that the closure and the  
10 housing are capable of relative movement between a first position, wherein the closure closes the dispensing outlet, and a second position, wherein the closure is spaced from the dispensing outlet such that access to the dispensing outlet is substantially unobstructed by the dust cap. This sliding hinge may, in a possible further embodiment, comprise first and second  
15 pins located on opposing sides of the dispensing end and first and second slots located on first and second opposing elongated sides of the closure, wherein the pins are captive within in the slots but capable of rotational and sliding movement within them.

20 In further possible embodiments, the inhaler may be a pMDI and the medicinal formulation may be a medicinal aerosol formulation.

Other aspects and features of the present invention are set forth in  
*inter alia* the claims appended hereto.

25

Each aspect of the invention may incorporate one or more of the other aspects of the invention or one or more features from the other aspects of the invention.

30 Further aspects and features of the invention are set forth in the non-limiting exemplary embodiments of the invention which will now be described with reference to the accompanying Figures of drawings.

### BRIEF DESCRIPTION OF THE DRAWINGS

FIGURE 1 shows a pMDI, having a dust cap comprising a restricting  
5 member, that is provided with a telescopic strap according to an  
embodiment of the present invention.

FIGURES 2A-2D illustrate the action of disengaging the dust cap of  
the embodiment shown in FIGURE 1.

10

FIGURES 3A-3J are various views of a pMDI according to another  
embodiment of the present invention.

FIGURES 3K-3M are various views of a modification of the  
15 embodiment illustrated in FIGURES 3A-3J.

FIGURES 4A and 4B show another embodiment of the present  
invention, wherein a dust cap is provided with elongated sides and is  
attached to a pMDI by slidable hinges.

20

FIGURE 5 shows a prior art strap for attaching a dust cap to the  
housing of a pMDI usable in the implementation of the invention.

FIGURE 6 shows a further embodiment of the present invention,  
25 wherein a dust cap is provided with a restricting member that comprises a  
pair of arms, configured as a clip to engage a step in the base of the  
housing of a pMDI.

FIGURES 6A-6E are respectively perspective, plan, cross-sectional,  
30 side and front views of the dust cap in FIGURE 6.

FIGURE 6F is a schematic, fragmentary, part sectional view of the dust cap and canister unit of the pMDI of FIGURE 6 assembled to the housing showing how the restricting member is positioned in the housing relative to the canister unit.

5

FIGURES 6G and 6H are schematic views of a modification that may be incorporated in the embodiment of FIGURES 6-6F.

FIGURES 7A and 7B show yet another embodiment of the present invention, having a dust cap secured to the housing of a pMDI by a strap and a restricting member attached to the strap and capable of entering the housing through a hole in its base.

FIGURES 8A and 8B show a yet further embodiment of the present invention wherein a restricting member is inserted between a canister unit and the inner surface of the housing of a pMDI, substantially preventing relative movement therebetween.

FIGURES 9A and 9B show a further embodiment of the invention in which a restricting member is mounted on the trailing end of the canister unit of a pMDI.

FIGURES 10A and 10B show an embodiment of the present invention having a restricting member inserted between a canister unit and the housing of a pMDI, through a display window in the housing.

FIGURES 11A and 11B show yet another embodiment of the invention in which a restricting member is adhesively secured to the canister unit and the housing of a pMDI.

30

FIGURES 12A and 12B show an alternative of the embodiment of FIGURES 11A and 11B.

FIGURES 13A and 13B show an embodiment of the invention in which a restricting member is adhesively secured to the canister unit of a pMDI through a window in the housing.

5

FIGURES 14A and 14B show a further embodiment of the invention in which a restricting member is mounted on the trailing end of the canister unit of a pMDI.

10

FIGURES 15A and 15B show another embodiment of the invention which corresponds to that shown in FIGURES 6-6F other than being provided with guide means to guide a user to mount the dust cap in the correct orientation on the dispensing outlet of a pMDI.

15

FIGURES 16A-16D illustrate how the guide means of the embodiment of FIGURES 15A and 15B operate.

FIGURES 17A and 17B show another embodiment of a dust cap in accordance with the present invention which incorporates the same principle of operation as the embodiment of FIGURES 15A and 15B.

20

FIGURES 18A and 18B show a modification of the embodiment of FIGURES 17A and 17B.

25

FIGURES 19A and 19B show a yet further embodiment of the invention in which a dust cap has means to prevent incorrect mounting thereof on a pMDI dispensing outlet.

FIGURES 20A and 20B show another embodiment of the invention in which a dust cap is provided with means to prevent and/or indicate incorrect mounting thereof on a pMDI dispensing outlet.

30

FIGURES 21A and 21B show yet another embodiment of the invention in which a dust cap is provided with means to prevent and/or indicate incorrect mounting thereof on a pMDI dispensing outlet.

- 5        FIGURES 22A-22C show a further embodiment of the invention in which a dust cap is provided with means to prevent and/or indicate incorrect mounting thereof on a pMDI dispensing outlet.

#### DETAILED DESCRIPTION OF THE EXEMPLARY EMBODIMENTS

10

In the following description like reference numerals have been used to indicate like parts in the different embodiments of the invention. Each embodiment is comprised in a pMDI which is hand-held and hand-operable.

- 15        FIGURES 1 and 2 are respectively front, perspective and side views showing a pMDI according to a first embodiment of the present invention. In this embodiment, the pMDI is based on a pMDI known in the prior art, as described in the 'Background of the Invention' section *supra*, although the present invention is not limited to the exact form of such an  
20 arrangement.

The pMDI comprises a canister unit 14 and a housing 1 in which the canister unit 14 is slidable along its longitudinal axis L-L. The housing 1 is generally tubular and of L-shape having an axial section 1a and a  
25 transverse section 1b configured as a mouthpiece 3. The housing 1 is preferably moulded from a plastics material, for example by injection moulding. Conveniently, the housing is of polypropylene. In the use orientation of the pMDI shown in FIGURES 1 and 2, the housing 1 has an upper open end 4a in the axial section 1a, through which the canister unit  
30 14 is reversibly slidable into the housing 1, and a lower open end 4b in the mouthpiece 3.



The canister unit 14 comprises a pressurised canister 14a having a metering valve (see reference numeral 50, FIGURE 6F) at its leading or business end and a dose counter module (see reference numeral 14b, FIGURE 6) mounted on the leading (valve) end of the canister 14a. The dose counter module 14b is as described and shown in WO-A-2004/001664 *supra*, the content of which is incorporated herein by reference in its entirety. The canister 14a contains a pressurised medicinal aerosol formulation, as known in the art and mentioned briefly hereinabove.

10 In use, a patient in need of a metered dose of the medicinal aerosol formulation places his or her lips on the mouthpiece 3 of the housing 1 and then concurrently inhales and, with their finger(s), depresses the canister unit 14 into the housing 1 (arrow F, FIGURE 1) to cause the metering valve 50 to release a metered dose of the medicinal formulation from the canister unit 14 for entrainment in the inspiratory airflow produced by the patient for deposition in their lungs. The depression of the canister unit 14 into the housing 1 also results in the dose counter module 14b recording the release of the dose and showing the number of metered doses left in the canister 14a.

20

A dust cap 5 is attached to the housing 1 by a telescopic strap 2 comprising first 7 and second 8 components. The first component 7 is attached at one end to the housing 1 by a hinge 9 and has a pin 11 at the opposite end to the housing 1. One end of the second component 8 is attached to the dust cap 5 by a second hinge 10. The second component 8 comprises a linear slot 12, in which the pin 11 of the first component 7 is held captive. As shown in FIGURES 2A-2D, although captive within the slot 12, the pin 11 is free to move along its length and thus the two components 7, 8 are capable of relative sliding motion along the length of the slot 12 between a contracted position, with a maximum overlap of the components 7, 8, and an extended position, with a minimum overlap of the components 7, 8.

As illustrated in FIGURES 2A-D, to remove the dust cap 5, the user pulls it away from the mouthpiece 3 with sufficient force to overcome a snap-fit connection therebetween (not shown), thereby extending the telescopic strap 2 to its extended position. Then, the telescopic strap 2 is pivoted at hinges 9, 10, swinging the dust cap 5 clear of the mouthpiece 3 so that it does not obstruct the mouthpiece 3 so that the pMDI is able to be actuated as described above.

To reapply the dust cap 5, the user moves the telescopic strap 2 about the hinges 9, 10 so that the dust cap 5 is repositioned in front of the mouthpiece 3 and is then pushed towards it, compressing the telescopic strap 2 towards its contracted position. The snap-fit connection reconnects.

Side walls 4 may be provided to substantially prevent relative rotational movement of the components 7, 8 about the pin 11.

From an inside surface of the dust cap 5 there projects a restricting member 6 for restricting movement of the canister unit 14 in the housing 1 when the cap 5 is mounted on the mouthpiece 3 such that inadvertent firing and counting cannot take place.

Referring to FIGURE 1, the restricting member 6 is in the form of an arm or prong structure comprising a pair of spaced apart arms 6a, 6b. When the dust cap 5 is positioned on the mouthpiece 3, as shown in FIGURE 2A, the arms 6a, 6b extend into the housing 1 through the lower open end 4b to straddle the stem block (see reference numeral 18, FIGURE 6) for the valve stem to sit underneath the dose counter module 14b at the leading end of the canister unit 14 (as shown in FIGURES 3F and 6F). The arms 6a, 6b prevent the canister unit 14 being depressed sufficiently in the housing 1 to either (a) cause the dose counter module 14b to record a dose

release event, or (b) cause the metering valve 50 to open for release of a metered dose of the medicament formulation. The arms 6a, 6b thus prevent inadvertent counting and firing when the dust cap 5 is mounted on the mouthpiece 3, which is nearly all the time as the dust cap 5 is only  
5 removed from the mouthpiece 3 when the patient needs a dose of the medicament formulation.

Such inadvertent counting and firing might occur, for example, if the arms 6a, 6b were not present, during shipping of the pMDI from the  
10 manufacturer to the distributor, or when the pMDI is in a patient's pocket or handbag, or even as a result of a person fiddling/playing with the pMDI. Wastage of the medicinal formulation is therefore reduced.

Moreover, as a safeguard, the dose counter module 14b is adapted  
15 to record release of a metered dose from the canister 14a after depression of the canister unit 14 into the housing by a distance which is less than that required for opening of the metering valve 50. In other words, the dose counter module is set-up for a 'count-not-fire' event, rather than a 'fire-not-count' event, if the pMDI is not used properly. This is because it is  
20 preferable for the dose counter display to show that there are less doses left than are actually available than vice-versa. However, it is not easy to depress the canister unit 14 only far enough to cause a 'count-not-fire' event.

25 In any event, the arms 6a, 6b prevent 'count-not-fire' events occurring while the dust cap 5 is on.

By having the restricting member 6 extend through the mouthpiece 3, no changes need to be made to the housing 1 to accommodate it. Thus,  
30 the dust cap 5 can be used with existing pMDI housings. Moreover, the profile of the inhalation airflow through the housing 1, which flows into the housing 1 through the upper open end 4a and out of the housing 1 through

the lower open end 4b, is unaffected by the provision of the restricting member 6, since it requires no change to the housing and is removed from the housing prior to use of the pMDI. Consequently, the pharmaceutical performance of the pMDI is unaffected by the provision of the restricting member 6 avoiding the need to obtain new regulatory approval for an existing pMDI product using the new dust cap 5.

It will be appreciated that providing the cap 5 with the telescopic strap 2 provides the cap 5 with the ability to be manoeuvred onto and off the mouthpiece 3 despite it carrying the restricting member 6.

In this embodiment, and the others hereinafter to be described with reference to the FIGURES of drawings, the dust cap 5 and the strap 2 are moulded from polypropylene (PP), although, of course, other materials, in particular plastics materials, and forming techniques, may be used. When the strap 2 is moulded, the hinges 9, 10 are so-called "living hinges". Moreover, the cap 5 is integrally formed with the restricting member 6 and the second component 8 of the strap. The first strap component 7 may be formed separately and then assembled to the second strap component 8. Alternatively, the strap 2 may be integrally formed with the first strap component 7.

FIGURES 3A-3J show a pMDI in accordance with a second embodiment of the invention which corresponds to the first embodiment *supra* in all respects bar some of the structure of the dust cap 5.

The dust cap 5 has a restricting member 6 in the form of an arm structure comprising a pair of arm members 6a, 6b. The free ends of each arm member 6a, 6b are configured as clips 6c, 6d which, when the cap 5 is mounted on the mouthpiece 3, clip to a step 20 (see also FIGURE 6) in the base surface of the housing 1 which supports the stem block (reference 18,

FIGURE 6). The clips 6c, 6d are formed by providing the free ends of the arm members 6a, 6b as a lollipop profile.

If the canister unit 14 is depressed into the housing 1 while the cap 5 is mounted on the mouthpiece 3, the leading end of the canister unit 14 will push down on the upper surfaces 6e, 6f of the arms 6a, 6b which, as shown schematically in FIGURE 3F, have a tapered or ramp profile. More particularly, when the cap 5 is located on the mouthpiece 3, as in FIGURE 3F, the upper surfaces 6e, 6f of the cap arms 6a, 6b taper upwardly in the outward or dispensing direction (arrow B). Thus, when the canister unit 14 is depressed into the housing 1 along its axis L-L (arrow A), its leading end abuts the upper surfaces 6e, 6f of the cap arms 6a, 6b tending to push the cap 5 outwardly (arrow B). However, this results in the clips 6c, 6d engaging the step 20 more firmly preventing ejection of the cap 5 and thus inadvertent counting and firing.

In the second embodiment the first component 7 of the telescopic strap 2 has a distal track member 7a with opposed side walls 4. At the distal end of the track member 7a the side walls 4 are bridged by a bridging element 4c. At the proximal end of the first component 7 there is a hinge member 7b which is secured to the housing 1. The track and hinge members 7a, 7b are hinged together by the hinge 9 whereby the track member 7a is hingable about the hinge member 7b.

As regards the second component 8 of the telescopic strap 2, this has a proximal slide member 8a which is linearly slidable in the track member 7a and guided in its linear stroke by the side walls 4. The slide member 8a has a resilient finger 8m at its proximal end which presents a stop element 8b which engages with the bridging element 4c to demark the extended position of the strap 2 and to keep the slide member 8a captive in the track member 7a. At the distal end of the second component 8 there is provided a hinge member 8c hinged to the slide member 8a through the

hinge 10. The hinge member 8c of the second component 8 is carried by the dust cap 5.

FIGURES 3G and 3H are schematic, fragmentary plan views of the telescopic strap 2 showing in greater detail the strap 2 in its extended and contracted configurations, respectively.

In FIGURE 3G there is shown the engagement of the stop element 8b with the bridging element 4c to demark the extended position. FIGURE 3I is a cross-sectional view of the stop element 8b taken on line 3I-3I in FIGURE 3H. The stop element 8b has a saw-tooth profile and this enables the slide member 8a to be assembled to the track member 7a by sliding of the proximal end of the slide member 8a under the bridging element 4c at the distal end of the track member 7a. The resilience of the finger 8m enables the stop member 8b to go under the bridging element 4c when pushed towards the hinge member 7b until it clears the bridging element 4c whereupon the finger 8m biases the stop element 8b upwardly so that it will abut the bridge element 4c when the slide member 8a is moved in the opposite direction.

20

FIGURE 3G also shows that the hinge member 7b has an aperture 7c therethrough for receiving therein a stud (not shown) on the rear 1r side of the housing 1 to connect the hinge part 7b to the housing 1, as shown in FIGURES 3A-3E.

25

From FIGURE 3H it will be seen that the proximal end of the slide member 8a is configured as a trident with the stop element 8b being on the middle finger 8m thereof. The outer fingers 8d, 8e of the trident are resilient fingers and on their outer surface which faces the opposing side wall 4 there is provided an elongate slot 8f, 8g, a schematic side view of which is shown in FIGURE 3J with arrow S indicating the sliding direction of the slide member 8a on the track member 7a.

30

As shown in FIGURES 3G and 3H, the outer surfaces of the side walls 4 facing the slide member 8a are each provided with an elongate rib 7d, 7e of complementary shape and dimension to the slots 8f, 8g in the outer fingers 8d, 8e of the trident. When the slide member 8a slides on the track member 7a to the contracted position shown in FIGURE 3H, for instance when the dust cap 5 is push-fit back onto the mouthpiece 3, the slots 8f, 8g on the outer fingers 8d, 8e snap-fit with the ribs 7d, 7e to securably, releasably fasten the strap 2 in the contracted position. This fastening mechanism may be the sole fastening mechanism (other than the clips 6c, 6d) for securing the dust cap 5 on the mouthpiece 3. There may also be a releasable fastening connection between the dust cap 5 and the mouthpiece 3 (e.g. features 19a and 19b in FIGURE 6F).

FIGURES 3K-3M show the dust cap 5 and telescopic strap 2 arrangement of FIGURES 3A-3J, but with the first component 7 of the strap 2 incorporating some modifications thereto.

Firstly, the aperture 7c in the hinge member 7b is provided with a slot 7s in its boundary wall. The slot 7s provides the aperture 7c with greater flexibility when receiving the stud (not shown) for assembly of the strap 2 to the housing 1. The aperture 7c is therefore unlikely to split.

Secondly, as shown particularly in FIGURE 3M, the track member 7a is provided with raised features 7t underneath the bridging element 4c. These are added to minimise the flexibility of the slide member 8a of the second component 8 of the strap 2 so as to make it harder for the first and second components 7, 8 of the strap 2 to be disassembled. That is to say, the raised features 7t increase the force needed for disassembly to avoid accidental separation by the user. In more detail, the raised features 7t are disposed so as to be underneath the resilient finger 8m to inhibit downward movement thereof. This therefore makes it more difficult for the stop

element 8b to be slid back underneath the bridging element 4c for disassembly of the strap 2. To assist assembly of the strap 2, the raised features 7t present an inclined lead-in surface 7u.

- 5           Thirdly, the bridging element 4c includes a reinforcing rib 7v to increase robustness.

          In an alternative embodiment of the invention, not shown, the strap for the dust cap 5 is made from an elastic stretchable material, for example  
10 knitted elastic. In this embodiment, the strap can be elastically extended to permit the user to remove or reapply the dust cap 5 and its flexibility allows the dust cap 5 to be easily positioned clear of the mouthpiece 3 whilst the pMDI is in use.

15           In a third embodiment of the invention, shown in FIGURES 4A and 4B, the dust cap 5 has elongated sides 13 which are disposable on opposed sides of the lateral section 1b of the housing 1. A pin 16 is provided on each side of the housing lateral section 1b. Each elongated side 13 of the dust cap 5 has a slot 15 along its length, which has closed ends. The slots  
20 15 hold the pins 16 captive. The arrangement of the slots 15 and pins 16 secures the dust cap 5 to the housing 1, whilst permitting the dust cap 5 to be rotated about the common axis A-A of the pins 16 and moved towards and away from the mouthpiece 3 along the length of the slots 15.

25           To remove the dust cap 5, the user pulls it away from the mouthpiece 3, sliding the pins 16 within the slots 15. The user then rotates the dust cap 5 about the pins 16, swinging it below the housing 1 to prevent it obstructing the mouthpiece 3. The dust cap 5 is then reapplied by swinging it back into a position in front of the mouthpiece 3 and then  
30 sliding it back over the pins 16 until it engages the mouthpiece 3.



Referring to FIGURE 5, there is shown a pMDI with a dust cap 5 attached to the housing 1 using a prior art strap 2, having fold lines 9, 10 at each end to permit the strap and dust cap 5 to be folded behind the housing when the pMDI is in use. The sides and roof of the dust cap 5 may be cut away, leaving a lip 17 with which the dust cap 5 engages the mouthpiece 3, as described in the 'Background of the Invention' section *supra*. In an embodiment of the invention, the dust cap 5 of this prior art arrangement is provided with a restricting member, such as illustrated and described herein. However, this embodiment is disadvantageous compared to others for the reasons discussed above in the 'Background of the Invention' section.

FIGURE 6 is a schematic view of a pMDI in accordance with a fourth embodiment of the present invention which corresponds closely to the second embodiment described with reference to FIGURES 3A-3J. In FIGURE 6 a scrap detail of the lower part of the housing 1 is shown to reveal the base surface in which the step 20 is formed and from which the stem block 18 for the valve stem (118, FIGURE 6F) projects upwardly. As further shown, the stem block 18 has a spray orifice 18a oriented towards the lower open end 4b in the mouthpiece 3 whereby the metered dose fired from the canister unit 14 on depression thereof into the housing 1 is directed out of the mouthpiece 3.

FIGURE 6 further shows the dose counter module 14b mounted on the leading (valve) end of the canister unit 14. The dose counter module 14b has a display window 14c which displays the number of metered doses of the medicament formulation left in the canister 14a, as described in WO-A-2004/001664 *supra*. The housing 1 has a cut-out or window 1c through which the patient can see the dose counter display 14c.

30

As detailed in WO-A-2004/001664, the dose counter module 14b has a counting mechanism which is driven through a rack-and-pinion

mechanism. FIGURE 6 shows the rack 30 which also projects upwardly from the housing base surface. The rack is slidingly received in an aperture (not shown) in the leading face of the dose counter module 14b. When the canister unit 14 is depressed into the housing 1 for opening of the metering valve, the rack drives a pinion (not shown) in the dose counter module 14b and the rotary movement of the pinion causes the counting mechanism to decrement the number displayed in the dose counter window 14c by dose counter wheels (not shown).

10 In the fourth embodiment of the invention the pMDI has a dust cap 5 for detachably engaging the mouthpiece 3 which corresponds to that shown in FIGURES 3A-3J other than that it does not include a connector or strap for connecting the cap 5 to the housing 1. Different views of the dust cap 5 of the fourth embodiment are shown in FIGURES 6A-6E.

15 As shown in FIGURES 6A-6E, the arms 6a, 6b forming the restricting member 6 are interconnected along part of their length by a strengthening rib 6h, in order to increase their strength and rigidity. As discussed previously, the configuration of the free ends of the arms 6a, 6b as clips 6c, 6d which engage the step 20 is advantageous, since if the canister unit 14 is moved downwards in the housing 1, for instance if the pMDI is dropped, it pushes the arms 6a, 6b towards the step 20, so as to increase the gripping force of the clips 6c, 6d to ensure that the dust cap 5 and restricting member 6 do not eject from the mouthpiece 3.

25 FIGURE 6F shows schematically how the restricting member 6 prevents actuation of the pMDI in the same way described for the second embodiment with reference to FIGURE 3F. Specifically, the arms 6a, 6b sit underneath the dose counter module 14b to prevent it moving towards the base 32 of the housing 1 the required distance for the valve stem 118 to be depressed into the canister 14a for release of the metered dose nor for the rack 30 to drive the pinion for decrementing the dose counter display 14c.

As further shown in FIGURE 6F, a clip 19a is provided on the dust cap 5 to engage a slot 19b on the outer surface of the mouthpiece 3 to provide additional retention of the dust cap 5 on the housing 1. However, none of the clips 6c, 6d, 19a prevent the dust cap 5 from being fairly easily removed from the housing 1 by a user.

The restricting member 6 is asymmetrically arranged in the dust cap 5, inasmuch as being located closer to the cap bottom than to the cap top (FIGURES 6A, 6C, 6D, 6F). If the dust cap 5 is mounted on the mouthpiece 3 in an inverted orientation, then the canister unit 14 may not be able to be inserted properly into the housing 1. Accordingly, the dust cap 5 may be provided with indicia indicating the correct orientation of the cap 5, for example by providing indicia on the cap outer surface, for instance on its front face 5a.

The restricting member 6 is also provided with lateral alignment ribs (wings) 21 to prevent it from being inserted at more than a prescribed angle to the mouthpiece 3, whereupon one of the arms 6a, 6b might be inserted into a hollow 18b in the stem block 18 or be otherwise obstructed by the components of the pMDI. In other words, the alignment ribs 21 help to ensure that the dust cap 5 is mounted on the mouthpiece 3 so that the arms 6a, 6b straddle the stem block 18 with the clips 6c, 6d clipping into engagement with the step 20.

25

In an alternative embodiment of the invention, not shown, the clips 6c, 6d of the restricting member 6 could be reconfigured such that they clip onto the stem block 18 to retain the cap 5 in place for blocking movement of the canister unit 14 in the housing 1 in the firing direction.

30

In a further alternative embodiment, not shown, the clips 6c, 6d of the restricting member 6 could be replaced with laterally extending clips

which, when the dust cap 5 is mounted on the mouthpiece 3, clip behind a sidewall 1s (FIG. 6) in the housing 1. Such lateral clips could also be used in conjunction with the clips 6c, 6d.

5 In another alternative embodiment, shown in FIGURES 6G and 6H, in addition to the restricting member 6, the dust cap 5 of FIGURES 6-6F is provided with a pair of supplementary clips 100, only the clip end 101 of one of the clips 100 being shown in FIGURES 6G and 6H. FIGURE 6G is a plan view of the clip end 101, while FIGURE 6H is an end view on arrow N  
10 in FIGURE 6G.

The clips 100 have resilient legs 103 which extend outwardly from the dust cap 5 on different sides of the central axis R-R (FIG. 6). As will be understood from FIGURE 6G in conjunction with FIGURE 6, when the dust  
15 cap 5 is mounted to the mouthpiece 3, the clips 100 extend through the opening 4b and the resilient legs 103 bias the clip ends 101 outwardly so they clip behind the sidewall 1s of the housing 1.

The clip ends 101 of the clips 100 are further provided with an  
20 extension 105 having an inclined surface 107. As shown in FIGURE 6H, the extensions 105 are configured and arranged to dispose the inclined surfaces 107 underneath the dose counter module 14b. If the canister unit 14 is moved downwardly in the housing 1 while the dust cap 5 is mounted on the mouthpiece 3, as indicated by arrow O in FIGURE 6H, the leading  
25 end of the dose counter module 14b will engage the inclined surfaces 107 and bias the clip ends 101 in the direction of arrow P resulting in the clip ends 101 clipping even more firmly behind the sidewall 1s of the housing 1. Thus, the clips 100 provide supplementary protection against the dust cap 5 being ejected from the mouthpiece 3 by downward movement of the  
30 canister unit 14 in the housing 1, e.g. caused by the user or dropping of the pMDI.

If desired, the clips 100 could be used as a restricting member in their own right, that is to say, in place of the restricting member 6. The clips 100 could also be used as a supplement to a restricting member which does not incorporate clips, for instance with the restricting member 6 of  
5 FIGURES 6-6F where the restricting member 6 is not provided with the clips 6c, 6d.

FIGURES 7A and 7B show a pMDI in accordance with a fifth embodiment of the present invention in which a strap 25 is provided to  
10 attach the dust cap 5 to the housing 1 and a restricting member 24 is mounted on said strap. The strap 25 and restricting member 24 are positioned so that when the dust cap 5 is in a position in which it engages the mouthpiece 3, the restricting member 24 protrudes into the housing 1 through a hole 28 in the base 32 of the housing 1 to act as a prop for the  
15 canister unit 14. The length of the restricting member 24 is such that it prevents the canister unit 14 from being depressed to within a predetermined distance of the base 32 of the housing 1 to prevent actuation (firing and counting) of the pMDI. When the dust cap 5 is removed, the strap 25 moves away from the base 32 of the housing 1 and  
20 the restricting member 24 exits the hole 28 thereby enabling the canister unit 14 to be actuated.

FIGURES 8A and 8B show a pMDI in accordance with a sixth embodiment of the present invention in which a disposable restricting  
25 member 22 is removably inserted between the housing 1 and the canister unit 14. The restricting member 22 is made from an elastically compressible material, such as a foam, and is inserted at the upper open end 4a of the housing 1 with the canister unit 14 positioned in a rest position in the housing 1 from which it needs to be depressed into the  
30 housing for operation of the dose counter module 14b and the metering valve 50. The restricting member 22 acts as wedge between the canister unit 14 and the inner surface of the housing 1 and also tilts the canister

unit 14 in the direction of arrow C into engagement with the housing inner surface. As the restricting member 22 is elastically compressible, it applies an outward lateral holding force on the inner surface of the housing 1 and the outer surface of the canister unit 14. Depression of the canister unit 14 into the housing 1 for actuation of the metering valve 50 and the dose counter module 14b is thereby prevented.

Unlike the previous embodiments hereinabove described with reference to the FIGURES of drawings, the restricting member 22 in the sixth embodiment also prevents or inhibits retraction of the canister unit 14 from the housing 1 until the restricting member 22 is removed.

As represented in FIGURE 8B, the restricting member 22 is removed and discarded prior to the first actuation of the pMDI. It is particularly useful for preventing inadvertent actuation of the pMDI before the pMDI is given to the patient, e.g. through knocks when being shipped or transported from the manufacturer to the distributor and then to the clinic.

The restricting member 22 may be adhesive, to further increase the holding force it applies to the canister unit 14 and the housing inner surface.

The wedge concept for the restricting member may also be realised in other shapes and configurations for the restricting member 22.

FIGURES 9A and 9B show a seventh embodiment of the invention in which an annular restricting member 22 is slid over the canister 14a to form a tight fit thereon, e.g. an interference or press fit. This is achieved by the restricting member 22 having an aperture 22a of transverse dimension which is no greater than that of the canister 14a and, where the aperture 22a is of a transverse dimension less than that of the canister 14a, being radially expandable when slid onto the canister 14a. The

restricting member 22 prevents depression of the canister unit 14 into the housing 1 far enough for actuation of the metering valve 50 and the dose counter module 14b by abutting with the lip 4c of the upper open end 4a of the housing 1. In this embodiment, the restricting member 22 is in the  
5 form of a foam collar, although other elastic or resilient materials would work equally well.

FIGURES 10A and 10B show an eighth embodiment of the present invention wherein the pMDI is packaged with a restricting member 23  
10 partially inserted into the housing 1 through the display window 1c. The user removes and discards the restricting member 23 from the housing 1 prior to the first actuation of the pMDI. When in place, the restricting member 23 separates the canister unit 14 and the base 32 of the housing 1. This prevents the canister unit 14 from moving sufficiently far inside the  
15 housing 1 for actuation of the metering valve 50 and the dose counter module 14b. As shown in FIGURE 10B, the user removes the restricting member 23 by pulling on the portion that remains exterior to the housing 1. With the restricting member 23 removed, the canister unit 14 is free to move inside the housing 1 for actuation of the pMDI.

20

In accordance with the invention, which may be considered a variant of the sixth and/or eighth embodiments, a discardable restricting member (not shown) may be positioned underneath the canister unit 14 so as to space the canister unit 14 from the base surface of the housing 1 so that  
25 the canister unit 14 is unable to be depressed far enough for actuation and counting. The restricting member may of the same material as in the sixth embodiment. The restricting member extends through the mouthpiece 3 and optionally may be releasably attached to a dust cap 5, e.g. through a temporary adhesive. The restricting member is removed by a user before  
30 first actuation of the inhaler by removing the dust cap 5 which either pulls the restricting member out of the housing 1 through the mouthpiece 3 or subsequently allows the user to pull the restricting member out of the

opened mouthpiece 3 by pulling on the free end of the restricting member located in, or protruding from, the mouthpiece 3. In the former case, the user subsequently removes the restricting member from the dust cap so that it can be discarded. The restricting member may be of elongate form  
5 and may be sized to extend into the space between the stem block 18 and the rack 30, e.g. so as to be wedged between the stem block 18 and the rack 30. It will be appreciated that the dust cap 5 need not be provided with its own restricting member.

10        FIGURES 11A and 11B show a ninth embodiment of the invention in which an adhesive restricting member 33 adheres to the canister unit 14 through the housing display window 1c. The restricting member 33 is an adhesive tape that also adheres to the housing 1. Securing the canister unit 14 and the housing 1 together in this manner prevents relative  
15 movement between the two such that the canister unit 14 can be neither actuated (firing and counting) nor removed. Prior to first use, the patient peels the restricting member 33 away and discards it, as shown in FIGURE 11B.

20        FIGURES 12A and 12B show a tenth embodiment of the invention having an adhesive restricting member 34 in the form of a double-sided adhesive tape which is folded over the lip 4c of the upper open end 4a of the pMDI housing 1 to define an inner tape section 34a, which is adhered to the outer surface of the canister unit 14, and an outer tape section 34b,  
25 which is adhered to the outer surface of the housing 1. The inner tape section 34a may also be adhered to the inner surface of the housing 1. As will be appreciated, this configuration prevents depression of the canister unit 14 into the housing 1 for actuation (firing and counting) thereof. The restricting member 34 is removed and discarded by the patient prior to first  
30 use of the pMDI.



FIGURES 13A and 13B show an eleventh embodiment of the invention which is similar to the ninth embodiment in having a restricting member 35 that is adhered to the canister unit 14 through the housing display window 1c. In this instance, however, the restricting member 35 is not adhered to the housing 1. The restricting member 35 is an adhesive pad of not negligible thickness, preferably at least the thickness of the housing 1 around the display window 1c, which is aligned adjacent the edge of the display window 1c. The canister unit 14 is prevented from moving downwards and upwards in the housing 1 for actuation and removal thereof by the blocking action of the restricting member 35 against the edge of the display window 1c. Again, the restricting member 35 is removed and discarded prior to the first actuation of the pMDI, as indicated in FIGURE 13B.

FIGURES 14A and 14B show a twelfth embodiment of the invention in which a restricting member 60 in the form of a cap is press-fitted to both the top of the canister unit 14 and the outer surface of the housing 1 adjacent its upper open end 4a. The cap may be formed by vacuum forming. Relative movement of the canister unit 14 in the housing 1 is thus prevented insofar as stopping actuation (firing and counting) and removal of the canister unit 14.

FIGURES 15A and 15B respectively show plan and front views of a dust cap 5 in accordance with a thirteenth embodiment of the invention which corresponds in nearly all respects to the dust cap 5 in the fourth embodiment shown in FIGURES 6-6F. The only difference of note is that the asymmetrically mounted restricting member 6 is further provided with a middle arm 6m projecting from the strengthening rib 6h between the outer arms 6a, 6b, thereby forming a trident configuration. The length of the middle arm 6m is shorter than the outer arms 6a, 6b.

In common with the first to fourth embodiments, the dust cap 5 of the thirteenth embodiment has a hollow body 5b which is of a shell form and a generally rectangular cross-sectional shape. The body 5b comprises the front face 5a and a side skirt 5c. The rear end of the side skirt 5c presents an annular lip 5d about a mouth 5e to the inner volume of the body 5b.

The restricting member 6 extends rearwardly from an inner surface 5f of the front face 5a.

10

The mouthpiece 3 of the pMDI housing 1 is of complementary shape and size to the cap body 5b whereby the cap body 5b is slidable rectilinearly over the mouthpiece 3 as a push-fit. It will also be appreciated that the mutual shapes of the cap body 5b and the mouthpiece 3 ensure that the cap 5 is non-rotatable on the mouthpiece 3.

Noting the respective shapes of the cap body 5b and the mouthpiece 3, in the fourth embodiment the cap body 5b is able to be push-fit onto the mouthpiece 3 in two different orientations of the cap 5 about its central axis R-R. In a first, correct orientation, in which the restricting member 6 is underneath the central axis R-R, as shown in FIGURES 6 and 6D, for example, the cap 5 is able to be push-fit onto the mouthpiece 3 so that the clips 6c, 6d clip to the step 20, as previously described. Moreover, as will be understood from FIGURE 6F, for example, the annular lip 5d of the side skirt 5c abuts an annular surface 3a of the pMDI housing 1 about the mouthpiece 3 so that there is no gap therebetween. In this position the clips 19a, 19b will also clip together.

However, if the cap 5 is turned upside-down (i.e. rotated 180° about the central axis R-R) from the first, correct orientation to a second, incorrect orientation, so that the restricting member 6 is disposed above the central axis R-R, the cap 5 is still able to be push-fit onto the

30

mouthpiece 3 so that the annular lip 5d abuts the annular housing surface 3a since the arms 6a, 6b of the restricting member 6 will straddle the stem block 18 and the strengthening rib 6h will be spaced from the stem block 18. Nonetheless, none of the clips 6c, 6d, 19a of the cap 5 will clip to their  
5 respective counterparts. Accordingly, the cap 5 will not be secured to the mouthpiece 3 as well as if in the first, correct orientation. Moreover, since there would be no gap between the annular lip 5d and the annular housing surface 3a, the user is not given an indication that the cap 5 is not correctly fitted on the mouthpiece 3.

10

There is therefore a possibility that the cap 5 could inadvertently detach from the mouthpiece 3, for instance if a downward pressure is applied to the base of the canister 14a since the leading end of the dose counter module 14b will tend to push the cap 5 outwardly by acting on the  
15 upside-down restricting member 6.

The cap 5 of the thirteenth embodiment is adapted to alleviate this possibility through the provision of the middle arm 6m, as will be described in more detail with reference to FIGURES 16A-D.

20

FIGURE 16A is an enlarged front view of the stem block 18 shown in FIGURES 6 and 6F. FIGURE 16B schematically shows that, when the dust cap 5 of the thirteenth embodiment is in its correct angular orientation about its central axis R-R, as shown in FIGURE 15B, the middle arm 6m of  
25 the restricting member 6 slides into the hollow 18b in the stem block 18 underneath the spray orifice 18a so as not to interfere with the push-fit mounting of the cap 5 on the mouthpiece 3 so that the clips 6c, 6d engage the step 20 and the clips 19a, 19b engage. Moreover, the annular cap body lip 5d will form a flush fit with the annular housing surface 3a.

30

On the other hand, FIGURE 16C shows that if an attempt is made to mount the cap 5 on the mouthpiece 3 in the incorrect upside-down

orientation, the middle arm 6m will hit the stem block 18 above the hollow 18b. As illustrated in FIGURE 16D, this will occur before the cap 5 has been pushed onto the mouthpiece 3 far enough for the annular cap body lip 5d to meet the annular housing surface 3a so that a gap G is left therebetween. The user is therefore given a tactile and visual indication that the cap 5 is incorrectly orientated, namely:-

- the resistance against further rectilinear movement of the cap 5 onto the mouthpiece 3 provided by the middle arm 6m abutting the stem block 18, and
- the existence of the gap G between the annular cap body lip 5d and the annular housing surface 3a.

The user will be prompted by these indications to orient the cap 5 into the correct orientation for installation on the mouthpiece 3.

Other means may be provided to prevent incorrect mounting of the cap 5 to the mouthpiece 3 additional to, or as an alternative to, the middle arm 6m. As an example, the cap body 5b may be provided with an extension which is offset to the central cap axis R-R, for instance the same side of the central axis R-R as the restricting member 6, and which does not interfere with mounting of the cap 5 to the mouthpiece 3 in the correct or intended cap orientation, but strikes a surface of the pMDI, e.g. the housing 1, when the cap 5 is attempted to be mounted to the mouthpiece 3 in the incorrect or unintended orientation. FIGURES 17A-B and 18A-B illustrate embodiments of the invention provided with such extensions.

FIGURES 17A-B show a fourteenth embodiment of the invention in which the cap body 5b has a resilient extension 5m which, in this particular embodiment, takes the form of a tongue, as will be understood from the underneath view of the cap 5 in FIGURE 17B. The extension 5m projects

from the side skirt 5c of the cap body 5b and, in the correct cap orientation, slides underneath the pMDI housing 1, as shown in FIGURE 17A. The extension is shaped to conform to the base 32 of the housing 1 and the resilience of the extension 5m biases it towards the housing base 5 32 so that it does not protrude from the housing 1.

As will be appreciated, the positioning and length of the extension 5m is such that, if an attempt is made to slide the dust cap 5 over the mouthpiece 3 in its incorrect orientation, the extension will hit a front face 10 1f of the housing 1 before the cap 5 is properly mounted on the mouthpiece 3. Again, an indication of this is given by the annular cap body lip 5d being spaced from the annular housing surface 3a when the extension 5m strikes the housing front face 1f.

15 FIGURES 18A and 18B illustrate a fifteenth embodiment of the invention in which the cap 5 corresponds to that shown in FIGURES 17A and 17B other than the resilient extension being in the form of a frame 5n, as shown in the underneath plan view of FIGURE 18B.

20 In FIGURES 19A and 19B there is shown another dust cap 5 in accordance with a sixteenth embodiment of the invention which corresponds to the fourth embodiment of FIGURES 6-6F, and optionally the thirteenth embodiment of FIGURES 15A and 15B, but where the annular cap body lip 5d lies on an inclined plane P-P which extends orthogonally to 25 the central axis R-R - along which the cap 5 is translated onto the mouthpiece 3 as in the other embodiments involving use of a dust cap 5, whether with a strap or not - but which is oriented at an inclined angle  $\sigma$  to the central axis R-R.

30 The annular housing surface 3a is of complementary form to the annular lip 5d so that, when the cap 5 is oriented correctly about its central axis R-R, as shown in FIGURE 19A, the cap 5 can be moved along its

central axis R-R onto the mouthpiece 3 until the lip 5d forms a flush fit with the annular housing surface 3a so that there is no gap therebetween. At this point, the clips 6c, 6d of the restricting member 6 engage with the step 20 in the housing, as do the clips 19a, 19b on the cap 5 and housing 1.

5

However, if the cap 5 is turned upside-down, as shown in FIGURE 19B, it is not possible for the annular lip 5d of the cap body 5b to form a flush fit with the annular housing surface 3a. The leading edge 5l of the lip 5d contacts the forwardmost edge 3l of the housing surface 3a leaving a gap G between the remainder of the opposing faces of the lip 5d and the housing surface 3a. The user thus has a visual indicator that the cap 5 is the wrong way up and needs to be inverted to the correct orientation for proper mounting on the mouthpiece 3.

15 In FIGURES 20A and 20B there is shown a dust cap 5 in accordance with a seventeenth embodiment of the invention. In this embodiment, the annular cap body lip 5d includes a tongue section 5s for receipt in a complementary groove section 3s in the annular housing surface 3a about the mouthpiece 3. The groove and tongue sections 3s, 5s can only fit  
20 together when the cap 5 is pushed over the mouthpiece 3 in the correct orientation for proper placement of the restricting member 6. The tongue and groove feature guides the user to place the cap 5 on the mouthpiece 3 correctly.

25 In this embodiment, the groove and tongue sections 3s, 5s are asymmetric. Thus, if desired, they could be one of a pair of such sections, on diametrically opposed sides of the cap 5 and the mouthpiece 3, since they would still only be able to mate if the cap 5 were correctly oriented due to the asymmetrical nature of these sections.

30

FIGURES 21A and 21B show a dust cap 5 of an eighteenth embodiment of the invention in which the annular housing surface 3a is

provided with a tongue section 3t, while the cap body lip 5d has a complementary groove section 5t which is only able to receive the tongue section 3t when the cap 5 is pushed onto the mouthpiece 3 in the correct cap orientation.

5

FIGURE 22A-22C show a dust cap 5 of a nineteenth embodiment of the invention in which the restricting member 6 is configured and arranged so that it is only insertable through the mouthpiece 3 of the housing 1 to its full extent when the cap 5 is oriented correctly. More particularly, the  
10 restricting member is given an asymmetric configuration whereby, in the correct orientation of the cap 5, the arm 6a of the restricting member 6 fits between the stem block 18 and the rack 30, and whereby, in the incorrect (inverted) orientation of the cap 5, the arm 6b of the restricting member 6 cannot fit between the stem block 18 and the rack 30. Consequently, in  
15 the incorrect orientation of the cap 5, the cap 5 is placed outwardly from the mouthpiece 3, as shown in FIGURE 22C.

It will be appreciated that the embodiments of the invention described with reference to FIGURES 15 to 22 are to address a possible  
20 problem if the dust cap 5 is not mounted to the pMDI housing 1 with the strap 2 or another type of connector. Where the strap 2 or connector is employed, the dust cap 5 will necessarily be presented to the mouthpiece 3 in the correct orientation. Nonetheless, these embodiments may still employ a strap or connector

25

Thus, a wide variety of different embodiments of the invention have been described which all restrict relative movement of the canister unit 14 in the housing the required distance for the dose counter module 14b to be actuated and a dose of the medicament formulation to be dispensed. Some  
30 of the embodiments also restrict the relative movement such that the canister unit 14 is unable to be removed from the housing 1 until the restricting member is removed or disengaged.

However, it will be appreciated that some embodiments of the invention have utility without inclusion of a restricting member, in particular some of the dust cap embodiments and the 'cap-to-pMDI housing' connector structures. Accordingly, the invention in some of its aspects is not limited to inclusion of a restricting means.

For the avoidance of doubt, it will be appreciated that the present invention is equally applicable where the canister unit 14 does not include the dose counter module 14b. That is to say, the canister unit 14 may simply be the pressurised canister 14a with its valve 50. Alternatively, some other accessory or cap or module may be mounted to the leading end of the canister 14a in place of the dose counter module 14b.

The restricting members of FIGURES 8 to 14 are particularly useful for preventing inadvertent actuation of the pMDI before the pMDI is given to the patient, e.g. through knocks, jolts or jars when being shipped or transported from the manufacturer to the distributor and then to the clinic.

The medicament contained in the canister unit 14 may be for the treatment of mild, moderate or severe acute or chronic symptoms or for prophylactic treatment. The medicament is suitable for treating respiratory diseases, e.g. asthma, chronic obstructive pulmonary disease (COPD), although may be for other therapeutic indications, e.g. treating rhinitis.

Appropriate therapeutic agents or medicaments may thus be selected from, for example, analgesics, e.g., codeine, dihydromorphine, ergotamine, fentanyl or morphine; antispasmodic preparations, e.g., diltiazem; antiallergics, e.g., cromoglycate (e.g. as the sodium salt), ketotifen or nedocromil (e.g. as the sodium salt); anti-infectives e.g., cephalosporins, penicillins, streptomycin, sulphonamides, tetracyclines and pentamidine; antihistamines, e.g., methapyrilene; anti-inflammatories, e.g.,



beclomethasone (e.g. as the dipropionate ester), fluticasone (e.g. as the propionate ester), flunisolide, budesonide, rofleponide, mometasone (e.g. as the furoate ester), ciclesonide, triamcinolone (e.g. as the acetone),  
 6 $\alpha$ , 9 $\alpha$ -difluoro-11 $\beta$ -hydroxy-16 $\alpha$ -methyl-3-oxo-17 $\alpha$ -propionyloxy-  
 5 androsta-1,4-diene -17 $\beta$ -carbothioic acid S-(2-oxo-tetrahydro-furan-3-yl) ester or 6 $\alpha$ , 9 $\alpha$ -Difluoro-17 $\alpha$ -[(2-furanylcarbonyl)oxy]-11 $\beta$ -hydroxy-16 $\alpha$ -methyl-3-oxo-androsta-1,4-diene-17 $\beta$ -carbothioic acid S-fluoromethyl ester; antitussives, e.g., noscapine; bronchodilators, e.g., albuterol (e.g. as free base or sulphate), salmeterol (e.g. as xinafoate), ephedrine,  
 10 adrenaline, fenoterol (e.g. as hydrobromide), formoterol (e.g. as fumarate), isoprenaline, metaproterenol, phenylephrine, phenylpropanolamine, pirbuterol (e.g. as acetate), reproterol (e.g. as hydrochloride), rimiterol, terbutaline (e.g. as sulphate), isoetharine, tulobuterol or 4-hydroxy-7-[2-[2-[3-(2-phenylethoxy) propyl] sulfonyl]  
 15 ethyl] amino]ethyl-2(3H) benzo-thiazolone; PDE4 inhibitors e.g. cilomilast or roflumilast; leukotriene antagonists e.g. montelukast, pranlukast and zafirlukast; [adenosine 2a agonists, e.g. 2R,3R,4S,5R)-2-[6-Amino-2-(1S-hydroxymethyl-2-phenyl-ethylamino)-purin-9-yl]-5 -(2-ethyl-2H-tetrazol-5-yl)-tetrahydro-furan-3,4-diol (e.g. as maleate)]; [ $\alpha$ 4 integrin inhibitors e.g.  
 20 (2S)-3-[4-(4-(aminocarbonyl)-1-piperidiny] carbonyl}oxy)phenyl]-2-[[((2S)-4-methyl-2-{[2-(2-ethylphenoxy)acetyl]amino}pentanoyl)amino] propanoic acid (e.g. as free acid or potassium salt)], diuretics, e.g., amiloride; anticholinergics, e.g., ipratropium (e.g. as bromide), tiotropium, atropine or oxitropium; hormones, e.g., cortisone, hydrocortisone or  
 25 prednisolone; xanthines, e.g., aminophylline, choline theophyllinate, lysine theophyllinate or theophylline; therapeutic proteins and peptides, e.g., insulin or glucagons. It will be clear to a person skilled in the art that, where appropriate, the medicaments may be used in the form of salts, (e.g., as alkali metal or amine salts or as acid addition salts) or as esters  
 30 (e.g., lower alkyl esters) or as solvates (e.g., hydrates) to optimise the activity and/or stability of the medicament and/or to minimise the solubility of the medicament in the propellant.

Preferably, the medicament is an anti-inflammatory compound for the treatment of inflammatory disorders or diseases such as asthma and rhinitis.

5

Preferably, the medicament is formulated in a hydrofluoroalkane propellant, such as HFA-134a or HFA-227 or a combination thereof.

Preferably, the medicament is an anti-inflammatory steroid, such as  
10 a corticosteroid, for instance fluticasone, e.g. as the propionate ester, or a long acting beta agonist (LABA), such as salmeterol, e.g. as the xinafoate salt, or a combination thereof.

Preferred medicaments are salmeterol, salbutamol, albuterol,  
15 fluticasone and beclomethasone and salts, esters or solvates thereof, for instance fluticasone propionate, albuterol sulphate, salmeterol xinafoate and beclomethasone dipropionate.

The medicament may also be a glucocorticoid compound, which has  
20 anti-inflammatory properties. One suitable glucocorticoid compound has the chemical name:  $6\alpha$ ,  $9\alpha$ -Difluoro- $17\alpha$ -(1-oxopropoxy)- $11\beta$ -hydroxy- $16\alpha$ -methyl-3-oxo-androsta-1,4-diene- $17\beta$ -carbothioic acid *S*-fluoromethyl ester (fluticasone propionate). Another suitable glucocorticoid compound has the chemical name:  $6\alpha$ ,  $9\alpha$ -difluoro- $17\alpha$ -[(2-furanylcabonyl)oxy]- $11\beta$ -  
25 hydroxy- $16\alpha$ -methyl-3-oxo-androsta-1,4-diene- $17\beta$ -carbothioic acid *S*-fluoromethyl ester. A further suitable glucocorticoid compound has the chemical name:  $6\alpha$ ,  $9\alpha$ -Difluoro- $11\beta$ -hydroxy- $16\alpha$ -methyl- $17\alpha$ -[(4-methyl-1,3-thiazole-5-carbonyl)oxy]-3-oxo-androsta-1,4-diene -  $17\beta$ -carbothioic acid *S*-fluoromethyl ester.

30

Other suitable anti-inflammatory compounds include NSAIDs e.g. PDE4 inhibitors, leukotriene antagonists, iNOS inhibitors, tryptase and elastase inhibitors, beta-2 integrin antagonists and adenosine 2a agonists.

5       The medicaments may be delivered in combinations. As an example, there may be provided salbutamol (e.g. as the free base of the sulphate salt) or salmeterol (e.g. as the xinafoate salt) in combination with an anti-inflammatory steroid, such as beclomethasone (e.g. as an ester, preferably dipropionate) or fluticasone (e.g. as an ester, preferably propionate).

10

It will be understood that the present invention has been described above by way of example only and that the above description should not be taken to impose any limitation on the scope of the claims. Specifically, although the present invention has been described with reference to a  
15 pMDI, the invention is not limited to this form of inhaler. The scope of the invention is defined by the appended claims.

CLAIMS

1. An inhaler for use with a container unit containing a medicament formulation to be dispensed, comprising:-
  - 5 a housing in which the container unit is relatively movable thereto to cause dispensing of a dose, preferably a metered dose, of the medicament formulation from the container unit for inhalation by a user through a dispensing outlet of the housing;  
a closure positionable to close the dispensing outlet; and
  - 10 a restricting member, provided on the closure, movable between a first position which enables relative movement between the container unit and the housing for dispensing of the dose of the medicament formulation, and a second position in which the restricting member restricts relative movement between the container unit and the housing such that
  - 15 dispensing of the dose of the medicament formulation is prevented;  
wherein when the closure is positioned to close the dispensing outlet, the restricting member enters the housing through the dispensing outlet to be disposed in its second position.
- 20 2. The inhaler of claim 1, wherein in use the dose of the medicament formulation is dispensed from the container unit when the container unit moves relative to the housing in a first direction and wherein the restricting member in its second position restricts movement of the container unit in the first direction.
- 25 3. The inhaler of claim 1 or 2, wherein in its second position the restricting member restricts relative movement between the container unit and the housing through physical engagement of the restricting member with the container unit.
- 30 4. The inhaler of claim 1, 2 or 3, wherein the restricting member, in its second position, is disposed in front of a leading end of the container unit.

5. The inhaler of any one of the preceding claims, wherein the housing has an axis along which the container unit is movable relative to the housing to dispense the dose of the medicament formulation and the  
5 restricting member, in its second position, extends laterally to the axis to restrict said relative movement.

6. The inhaler of any preceding claim, wherein the restricting member is configured as an arm structure.

10

7. The inhaler of any preceding claim, wherein the restricting member is configured as a clip which, in its second position, clips to the housing and/or the container unit to retain the restricting member in its second position.

15

8. The inhaler of any preceding claim, wherein the container unit is a dispensing container unit having first and second parts which are movable relative to one another, said relative movement causing dispensing of the dose of the medicament formulation from the dispensing container unit,  
20 and wherein the housing has a support for supporting the first part of the dispensing container unit in a stationary position relative to the housing so that, in use, the second part is able to move in the housing relative to the first part to dispense the dose of the medicament formulation, and wherein the restricting member, in its second position, restricts the movement of  
25 the second part relative to the first part to prevent dispensing of the dose.

9. The inhaler of claim 8, wherein one of the first and second parts is a dispensing outlet member of the dispensing container unit and the other part is a container member containing the medicament formulation.

30

10. The inhaler of claim 9, wherein the first part is the dispensing outlet member and the second part is the container member and wherein the

support is adapted in use to direct the output of the dispensing outlet member out of the housing through the dispensing outlet thereof.

11. The inhaler of claim 8, 9 or 10 which is a pressurised metered dose  
5 inhaler (pMDI) with the second part being a pressurised container member containing therein the medicament formulation under pressure and the first part being a valve stem of a metering valve for releasing a metered dose of the pressurised medicament formulation from the dispensing container unit upon relative movement between the pressurised container member and  
10 the valve stem.

12. The inhaler of any of claims 8 to 11, wherein the restricting member comprises a pair of arms that straddle the support when the restricting member is in the second position.

15

13. The inhaler of claims 11 and 12, wherein the support is a stem block for receiving the valve stem.

14. The inhaler of any one of claims 8 to 13 when appended to claim 7,  
20 wherein the clip detachably engages the support.

15. The inhaler of claim 7 or any claim appended thereto, wherein the clip detachably engages a step in the housing.

25 16. The inhaler of any one of claims 8 to 14 in combination with claim 15, wherein the step is in a surface of the housing on which the support is provided.

17. The inhaler of any one of the preceding claims, wherein the closure is  
30 movable between a closing position, engaged with the housing, in which it closes the dispensing outlet and places the restricting member in the

second position, and an opening position in which it opens the dispensing outlet and places the restricting member in its first position.

18. The inhaler of any one of the preceding claims, wherein the closure is  
5 detachably mountable on the housing.

19. The inhaler of claims 17 and 18, wherein in use the closure is moved from its closing position to its opening position by detaching the closure from the housing.  
10

20. The inhaler of any one of the preceding claims in which the closure is releasably engageable with the dispensing outlet of the housing to close the dispensing outlet.

15 21. The inhaler of claims 17 and 20, wherein in use the closure is moved from its closing position to its opening position by disengaging the closure from the dispensing outlet.

22. The inhaler of any one of the preceding claims further having an  
20 indicator for indicating dispensing from the container unit.

23. The inhaler of claim 22 in which the indicator has a visual display for indicating dispensing from the container unit.

25 24. The inhaler of claim 23 in which the indicator is adapted to update the display in response to movement of the container unit relative to the housing.

25. The inhaler of claim 24, wherein the indicator is adapted to update  
30 the display in response to relative movement of the container unit to the housing by a distance which is less than that required for dispensing of the dose of the medicament formulation from the container unit and wherein

the restricting member in its second position restricts the relative movement of the container unit and the housing such as to prevent updating of the display.

- 5 26. The inhaler of any one of the preceding claims provided with the container unit.

27. The inhaler of claim 26 in which the container unit further has a metering mechanism for dispensing a metered dose of the medicament  
10 formulation on movement of the container unit relative to the housing.

28. The inhaler of claim 26 or 27 when appended to any one of claims 22 to 25, wherein the indicator is comprised in the container unit.

- 15 29. The inhaler of claim 28, wherein the indicator is mounted on a container member of the container unit which contains the medicament formulation and suitably the restricting member, in its second position, co-operates with the indicator to restrict relative movement between the container unit and the housing.

20

30. The inhaler of claim 28 or 29 in which the indicator is mounted at the leading end of the container unit.

31. The inhaler of claim 28, 29 or 30 when appended to claim 8 in which  
25 the indicator is comprised in the second part of the container unit.

32. The inhaler of any one of the preceding claims, wherein the dispensing outlet of the housing is in a nozzle configured for insertion into a human or animal body orifice, for example a nostril or a mouth of a human  
30 or animal body.



33. The inhaler of any preceding claim further having a connector which connects the housing and the closure to one another.

34. The inhaler of claim 33, wherein the connector is extensible.

5

35. The inhaler of claim 33 or 34, wherein the connector is telescopic.

36. The inhaler of claim 34 or 35, wherein the connector comprises:-  
a first component, attached to the housing; and

10

a second component, attached to the closure;

wherein the components are capable of relative movement, suitably sliding movement, between a contracted position, in which the closure closes the dispensing outlet, and an extended position, in which the closure is spaced from the dispensing outlet.

15

37. The inhaler of claim 36, wherein one of said components comprises a pin and the other comprises a slot, wherein the pin is captive within the slot and capable of movement within it.

20 38. The inhaler of claim 36 or 37, wherein at least one of the components comprises hinging means.

39. The inhaler of any one of claims 33 to 38, wherein the connector is a strap.

25

40. The inhaler of claims 34 and 39, wherein the strap is elastically stretchable between a contracted state, in which the closure is positionable to close the dispensing outlet, and an extended state, in which the closure is spaced remote from the dispensing outlet.

30

41. The inhaler of claim 33, wherein the connector comprises a sliding hinge joining the closure to the housing such that the closure and the

housing are capable of relative movement between a first position, in which the closure closes the dispensing outlet, and a second position, in which the closure is spaced from the dispensing outlet such that access thereto is substantially unobstructed thereby.

5

42. The inhaler of claim 41, wherein the sliding hinge comprises:-

first and second pins located on opposing sides of the dispensing outlet; and

first and second slots located on first and second opposing elongated  
10 sides of the closure,

wherein the pins are captive within the slots, but capable of rotational and sliding movement within them.

43. An inhaler comprising a housing having a dispensing outlet, and a  
15 closure for closing the dispensing outlet, wherein the closure comprises a connector part for connecting the closure to the housing characterised in that the connector part is extendible.

44. The inhaler of claim 43, wherein the connector part is telescopic.  
20

45. The inhaler of claim 43 or 44, wherein the connector part comprises  
a first component, attached to the housing; and  
a second component, attached to the closure;  
wherein the components are capable of relative movement, suitably sliding  
25 movement, between a contracted position, in which the closure closes the dispensing outlet, and an extended position, in which the closure is spaced remote from the dispensing outlet.

46. The inhaler of claim 45, wherein one of said components comprises a  
30 pin and the other comprises a slot, wherein the pin is captive within the slot and capable of movement within it.

47. The inhaler of claim 45 or 46, wherein at least one of the components comprises hinging means.

48. The inhaler of any one of claims 43 to 47, wherein the connector part  
5 is a strap.

49. The inhaler of claims 43 and 48, wherein the strap is elastically stretchable between a contracted state, in which the closure is positioned to close the dispensing outlet, and an extended state, in which the closure  
10 is positioned remote from the dispensing outlet.

50. The inhaler of claim 43, wherein the connector part comprises a sliding hinge joining the closure to the housing such that the closure and the housing are capable of relative movement between a first position, in  
15 which the closure closes the dispensing outlet, and a second position, in which the closure is spaced remote from the dispensing outlet such that access to the dispensing outlet is substantially unobstructed by the closure.

51. The inhaler of claim 50, wherein the sliding hinge comprises  
20 first and second pins located on opposing sides of the dispensing outlet; and

first and second slots located on first and second opposing elongated sides of the closure,

wherein the pins are captive within the slots, but capable of  
25 rotational and sliding movement within them.

52. An inhaler comprising:-

a housing in which a medicament formulation is received and a dispensing member is relatively movable to cause dispensing of a dose,  
30 preferably a metered dose, of the medicament formulation for inhalation by a user through a dispensing outlet of the housing; and

a restricting member adapted to restrict relative movement between the dispensing member and the housing such that dispensing of the dose of the medicament formulation is prevented;

characterised in that the restricting member is fastened to the  
5 canister unit.

53. The inhaler of claim 52 in which the restricting member is further fastened to the housing so as to connect the dispensing member to the housing to restrict said relative movement.

10

54. The inhaler of claim 52 or 53 in which the restricting member is releasably fastened to the dispensing member and/or the housing.

55. The inhaler of any of claims 52 to 54 in which the restricting member  
15 is adhesively secured to the dispensing member and/or the housing.

56. The inhaler of any of claims 52 to 55 in which the restricting member is fastened to an end of the dispensing member which protrudes from the housing.

20

57. The inhaler of any of claims 52 to 56 in which the restricting member is adapted to abut the housing to restrict said relative movement.

58. The inhaler of claim 56 or claims 56 and 57 in which the restricting  
25 member is selected from the group consisting of a cap or collar mounted on the dispensing member end.

59. The inhaler of any of claims 52 to 55 in which the restricting member is disposed in an aperture in the housing, the aperture having an edge  
30 against which the restricting member is adapted to abut to restrict said relative movement.

60. The inhaler of any of claims 52 to 60 in which the restricting member is fastened to the dispensing member by an interference fit or a press fit.

61. The inhaler of any of claims 52 to 60 in which the restricting member  
5 is fastened to the dispensing member for movement therewith.

62. An inhaler comprising:-

a housing in which a medicament formulation is received and a dispensing member is relatively movable to cause dispensing of a dose,  
10 preferably a metered dose, of the medicament formulation for inhalation by a user through a dispensing outlet of the housing; and

a restricting member which is inserted between the dispensing member and the housing to restrict the relative movement therebetween such that dispensing of the dose of the medicament formulation is  
15 prevented.

63. The inhaler of claim 62, wherein the restricting member is a wedge between the dispensing member and the housing.

20 64. The inhaler of claim 62 or 63, wherein the restricting member is made from an elastically compressible material.

65. The inhaler of claim 64, wherein the restricting member is in a compressed state.

25

66. The inhaler of any of claims 62 to 65, wherein the restricting member is of a foam material.

67. The inhaler of any one of claims 62 to 66, wherein a portion of the  
30 restricting member projects from the housing to enable the restricting member to be pulled from the housing thereby enabling relative movement

between the dispensing member and the housing which causes the dose to be dispensed.

68. The inhaler of claim 67, wherein the restricting member projects  
5 from an opening in the housing.

69. The inhaler of any of claims 52 to 68 in which the dispensing member is movable along an axis of the housing, movement of the dispensing member in a first axial direction causing dispensing of the dose  
10 and movement in an opposed second axial direction removing the dispensing member from the housing, wherein the restricting member restricts movement of the dispensing member in the first and second axial directions.

15 70. The inhaler of any of claims 62 to 68 in which the dispensing member is movable relative to the housing along an axis to cause dispensing of the dose, wherein the restricting member is inserted between axially-oriented surfaces of the dispensing member and the housing.

20 71. An inhaler comprising:-

a housing in which a medicament formulation is received and a dispensing member is relatively movable along an axis of the housing, movement of the dispensing member in a first axial direction causing dispensing of a dose, preferably a metered dose, of the medicament  
25 formulation for inhalation by a user through a dispensing outlet of the housing, and movement in an opposed second axial direction removing the dispensing member from the housing; and

a restricting member which is positioned in the inhaler to restrict relative movement between the dispensing member and the housing along  
30 said axis such that dispensing of the dose of the medicament formulation is prevented and removal of the dispensing member from the housing is inhibited or prevented.

72. An inhaler comprising:-

a housing in which a medicament formulation is received and a dispensing member is relatively movable to cause dispensing of a dose, preferably a metered dose, of the medicament formulation for inhalation by a user through a dispensing outlet of the housing; and

a restricting member movable between a first position which enables relative movement between the dispensing member and the housing for dispensing of the dose of the medicament formulation, and a second position in which the restricting member restricts relative movement between the dispensing member and the housing such that dispensing of the dose of the medicament formulation is prevented;

characterised in that the restricting member enters the housing through the dispensing outlet to be disposed in its second position.

73. The inhaler of claim 72, wherein the restricting member is releasably attachable to the housing in its second position.

74. The inhaler of claim 72 or 73, wherein the restricting member is part of an accessory which is attachable to the housing.

75. The inhaler of claim 74, wherein the accessory is attachable to the dispensing outlet of the housing.

76. The inhaler of any of claims 52 to 75 in which the dispensing member is a container unit in which the medicament formulation is contained.

77. The inhaler of any of claims 1 to 76 which is a pMDI.

78. The inhaler of any preceding claim, wherein the medicament formulation is an inhalable formulation, for example an aerosol formulation.

79. An accessory for use with an inhaler which comprises a housing for receiving therein a medicament formulation and a dispensing member for relative movement therebetween which causes a dose of the medicament formulation to be dispensed for inhalation by a user through a dispensing outlet of the housing, the accessory adapted to be releasably attached to the inhaler in a use position and having a restricting member which, when the accessory is attached to the inhaler in its use position, extends into the housing through the dispensing outlet to restrict the relative movement between the housing and the dispensing member such that dispensing of the dose is prevented.

80. The accessory of claim 79 which is engaged with the housing in its use position.

15

81. The accessory of claim 79 or 80 which is engaged with the dispensing outlet in its use position.

82. The accessory of claim 79, 80 or 81 which is a closure for closing the dispensing outlet in the use position.

83. The accessory of any of claims 79 to 82, wherein the restricting member is an arm structure.

25 84. The accessory of claim 83, wherein the arm structure has a pair of spaced-apart arm members.

85. The accessory of any of claims 79 to 84, wherein the restricting member is configured as a clip for clipping to the housing and/or the dispensing member.

30



86. The accessory of claim 85 when appended to claim 83 or 84, wherein the arm structure has a distal end configured as a clip portion.

87. The accessory of claims 85 and 86, wherein the distal end of each  
5 arm member has a clip portion.

88. The accessory of any of claims 79 to 87 having a connector part for connecting the accessory to the housing whereby the accessory is movable between a non-use position and the use position while connected to the  
10 housing.

89. A closure for use with an inhaler which comprises a housing for receiving therein a medicament formulation for inhalation by a user through a dispensing outlet of the housing, the closure having a closing  
15 part for closing the dispensing outlet of the housing and a connector part for connecting the closure to the housing, the closing part being movable between a closing position, in which it closes the dispensing outlet, and an opening position, in which it opens the dispensing outlet, while the closure is connected to the housing by the connector part, characterised in that the  
20 connector part is extendible between a contracted state and an extended state to enable the closure part to move between its closing and opening positions, respectively.

90. The closure of claim 89, wherein the connector part is a strap.  
25

91. The closure of claim 89 or 90, wherein the connector part is telescopic.

92. A connector for connecting an accessory to an inhaler housing in  
30 which a medicament formulation is received and in which a dispensing member is relatively movable to dispense a dose of the medicament formulation for inhalation by a user at a dispensing outlet of the housing,

wherein the connector comprises a restricting member adapted in use to restrict movement of the dispensing member relative to the housing to prevent the dose being dispensed.

5 93. The connector of claim 92, wherein the restricting member is insertable through an opening in the housing to a position in which it restricts the relative movement of the dispensing member to the housing.

94. The connector of claim 92 or 93 carrying the accessory which is  
10 engageable on the housing in a use position, the restricting member being positioned to restrict said relative movement when the accessory is in its use position.

95. The connector of claim 94, wherein the accessory is a closure which  
15 in its use position closes the dispensing outlet.

96. A dispensing device for dispensing a substance comprising:-  
a housing in which the substance is receivable and which has a  
dispensing nozzle from which the substance is in use dispensed; and  
20 a closure for releasable mounting on the nozzle for closure thereof;  
wherein the closure comprises a cap member which is configured and arranged with respect to the nozzle such as to be capable of being slid over the nozzle in an intended orientation of the cap member and an unintended orientation of the cap member;  
25 wherein in the intended orientation of the cap member the closure is securably mounted on the nozzle by sliding the cap member over the nozzle by a predetermined amount to a stationary position; and  
wherein the housing and the closure are configured and arranged with respect to each other such that the cap member cannot slide over the  
30 nozzle by the predetermined amount to a stationary position when in the unintended orientation thereby to indicate to the user that the closure is not correctly mounted on the nozzle.

97. The device of claim 96, wherein an attempt to slide the cap member over the nozzle when the cap member is in the unintended orientation results in the closure and the housing inter-engaging before the cap member can be slid over the nozzle by the predetermined amount.

98. The device of claim 97, wherein the closure is provided with an extension for abutting the housing before the cap member can be slid over the nozzle by the predetermined amount when in the unintended orientation.

99. The device of claim 98, wherein the extension extends through the nozzle when the cap member is slid over the nozzle.

100. The device of claim 99, wherein the extension is provided on the cap member.

101. The device of any of claims 96 to 100, wherein the cap member has a skirt which presents a mouth at one end thereof for slidably receiving the nozzle.

102. The device of claims 101 when appended to any of claims 98 to 100, wherein the extension extends from the skirt or from the opening.

103. The device of claim 101 or 102, wherein the skirt presents a lip about the mouth, wherein the lip abuts a housing surface when the cap member is slid over the nozzle in the intended orientation by the predetermined amount, and wherein a gap is left between the lip and the housing surface when an attempt is made to slide the cap member over the nozzle in the unintended orientation thereby to indicate to the user that the closure is not correctly mounted on the nozzle.

104. The device of any of claims 96 to 103, further having a dispensing member which is relatively movable in the housing to cause dispensing of the substance from the nozzle, wherein the closure further has a restricting member which, when the closure is securably mounted to the nozzle with  
5 the cap member in the intended orientation, restricts relative movement between the dispensing member and the housing such that dispensing of the substance is prevented.

105. The device of claim 104, wherein the restricting member extends  
10 through the nozzle when the closure is securably mounted to the nozzle with the cap member in the intended orientation.

106. The device of claim 104 or 105, wherein the restricting member is provided on the cap member.  
15

107. The device of any of claims 104 to 106 when appended to any of claims 98 to 100 and 102, wherein the restricting member comprises the extension.

20 108. The device of any of claims 104 to 107, wherein the dispensing member is a container unit in which the substance is contained.

109. The device of any of claims 96 to 108 which is a medicament dispenser.  
25

110. The device of claim 109 which is an inhaler.

111. The device of claim 110 which is a pMDI.

30 112. A closure for closing a dispensing nozzle of a dispensing device, the closure having:-

a cap adapted in use to be securably mounted on the nozzle by insertion of the nozzle into the cap a predetermined amount when the cap is in an intended orientation, and

an extension for engaging the dispensing device when an attempt is  
5 made to insert the nozzle into the cap in an unintended orientation thereof, the extension being configured and arranged such that it engages the dispensing device before the nozzle is able to be inserted into the cap by the predetermined amount when the cap is in the unintended orientation, thereby to indicate that the closure is not being correctly mounted on the  
10 nozzle.

113. The closure of claim 112, wherein the cap is slidable over the nozzle in a first direction and the extension extends from the closure in the first direction.

15

114. The closure of claim 112 or 113, wherein the extension is disposed asymmetrically on the closure.

115. The closure of any of claims 112 to 114, wherein the cap has an  
20 imaginary axis of rotation about which the cap is rotatable between its intended and unintended orientations and the extension is disposed offset to the axis.

116. The closure of claim 115, wherein the extension extends generally  
25 parallel to the axis.

117. The closure of any of claims 112 to 116, wherein the cap has a skirt portion which presents a mouth at one end thereof for slidably receiving the nozzle.

30

118. The closure of claim 117, wherein the extension extends from the skirt portion or the opening.

119. The closure of claim 117 or 118, wherein the cap further has an end wall portion across the end of the skirt portion opposite the mouth.

5 120. The closure of 119, wherein the extension extends from the end wall out of the opening.

121. The closure of claim 115 or any claim appended thereto, wherein the imaginary axis of rotation is a central axis of the cap.

10

122. The closure of any of claims 117 to 120 when appended to claim 115 or of claim 121 when appended to claim 117, wherein the skirt portion is disposed about the axis.

15 123. The closure of any of claims 112 to 122, wherein the extension is in the form of a tongue, a frame or an arm.

124. The closure of claim 123 when appended to claim 118, wherein the tongue or frame extends from the skirt portion.

20

125. The closure of claim 123 when appended to claim 118, wherein the arm extends from the opening.

25 126. The closure of any of claims 112 to 125, wherein the extension has a plurality of limbs at its distal end.

127. The closure of any of claims 112 to 126, wherein the extension is provided with one or more connector elements for releasably connecting with the dispensing device.

30

128. The closure of claim 127, wherein the connector element(s) is configured as a clip element for clipping to the dispensing device.

129. The closure of claim 127 or 128, wherein the connector element(s) is at the distal end of the extension.

5 130. The closure of claims 126 and 129, wherein the distal end of at least one of the limbs is configured as the connector element.

131. The closure of any of claims 112 to 130, wherein the extension extends through the nozzle when the closure is securably mounted on the  
10 nozzle.

132. The closure of any of claims 112 to 131, wherein at least a portion of the extension is adapted for (i) receipt in a socket of the dispensing device when the cap is slid over the nozzle in the intended cap orientation, and (ii)  
15 engagement with a surface of the dispenser device spaced from the socket when an attempt is made to slide the cap over the nozzle in its unintended cap orientation.

133. The closure of claim 132, wherein the at least a portion of the  
20 extension is at its distal end.

134. A dust cap for a pMDI having a cap part adapted for a push-fit on the dispensing nozzle of the pMDI and a strap part for connecting the dust cap to the pMDI, wherein the cap part is slidably mounted on the strap part for  
25 sliding movement between an extended position and a contracted position.

135. The cap of claim 134, wherein one of the cap part and the strap part comprises a slide member and the other part comprises a track member for the slide member to slide on.  
30

136. The cap of claim 135, wherein the slide member and the track member define a telescoping arrangement.

137. The cap of claim 134, 135 or 136 having a latching mechanism for latching the cap part in the contracted position.

5 138. The cap of any of claims 134 to 137, wherein the strap part and the cap part have latching elements adapted to latch the cap part in the contracted position.

139. The cap of claim 138 when appended to claim 135 or 136, wherein  
10 the latching elements are carried by the slide and track members.

140. The cap of claim 138 or 139, wherein the latching element comprise one or more male latching features and a corresponding number of complementary female latching features.

15

141. The cap of any of claims 134 to 140, wherein the cap part comprises a cap member for the nozzle.

142. The cap of claim 141 when appended to claim 135, wherein the cap  
20 member is movably mounted to the slide or track member.

143. The cap of any of claims 134 to 142, wherein the strap part comprises a connector member for connecting the strap part to the pMDI.

25 144. The cap of claim 143 when appended to claim 135, wherein the connector member is movably mounted to the slide or track member.

145. The cap of any of claims 134 to 144, wherein the cap part and/or the strap part are integrally formed parts.

30

146. The cap of any of claims 134 to 145, wherein the cap part and/or the strap part are of a plastics material.



147. The cap of any of claims 134 to 146 having a stop mechanism for stopping the cap part in the extended position.

- 5 148. The cap of claim 147, wherein the stop mechanism comprises stop elements on the strap part and the cap part which engage when the cap part is in the extended position.

149. The cap of claim 148, wherein the stop elements are carried by the  
10 slide member and the track member.

150. The cap of claim 147, 148 or 149, wherein the stop mechanism secures the cap and strap parts together.

- 15 151. The cap of claim 148, or of claim 49 or of claim 150 when appended to claim 148 or 149, wherein a first stop element comprises an opening on one of the slide and track members through which a second stop element on the other part projects, the second stop element having an enlarged section which abuts the edge of the opening in the extended position of the  
20 cap part.

152. The cap of claim 151, wherein one or more projecting elements project into the opening to inhibit extraction of the enlarged section through the opening.  
25

153. The cap of claim 143 or any claim appended thereto, wherein the connector member has an aperture for mounting on a protrusion on the pMDI.

- 30 154. The cap of claim 153, wherein the aperture has a slot in its boundary surface to increase its flexibility.

155. An inhaler substantially as hereinbefore described with reference to FIGURES 1 and 2A-D, or FIGURES 3A-J, or FIGURES 3K-M, or FIGURES 4A-B, or FIGURE 5, or FIGURES 6 and 6A-F, or FIGURES 6G-H, or FIGURES 7A-B, or FIGURES 8A-B, or FIGURES 9A-B, or FIGURES 10A-B, or FIGURES
- 5 11A-B, or FIGURES 12A-B, or FIGURES 13A-B, or FIGURES 14A-B, or FIGURES 15-16, or FIGURES 17A-B, or FIGURES 18A-B, or FIGURES 19A-B, or FIGURES 20A-B, or FIGURES 21A-B or FIGURES 22A-C of the accompanying drawings.
- 10 156. A closure substantially as hereinbefore described with reference to FIGURES 1 and 2A-D, or FIGURES 3A-J, or FIGURES 3K-M, or FIGURES 4A-B, or FIGURE 5, or FIGURES 6 and 6A-F, or FIGURES 6G-H, or FIGURES 7A-B, or FIGURES 15-16, or FIGURES 17A-B, or FIGURES 18A-B, or FIGURES 19A-B, or FIGURES 20A-B, or FIGURES 21A-B or FIGURES 22A-C
- 15 of the accompanying drawings.
157. A connector for connecting an accessory to an inhaler housing substantially as hereinbefore described with reference to FIGURES 1 and 2A-D, or FIGURES 3A-J, or FIGURES 3K-M, or FIGURES 4A-B or FIGURES
- 20 7A-B of the accompanying drawings.



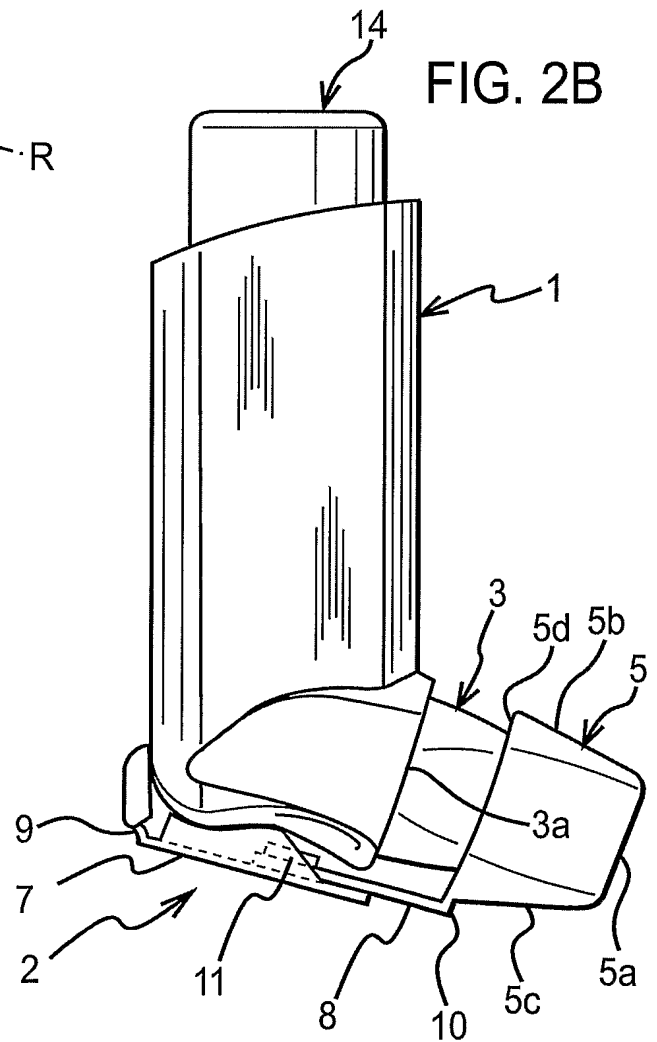
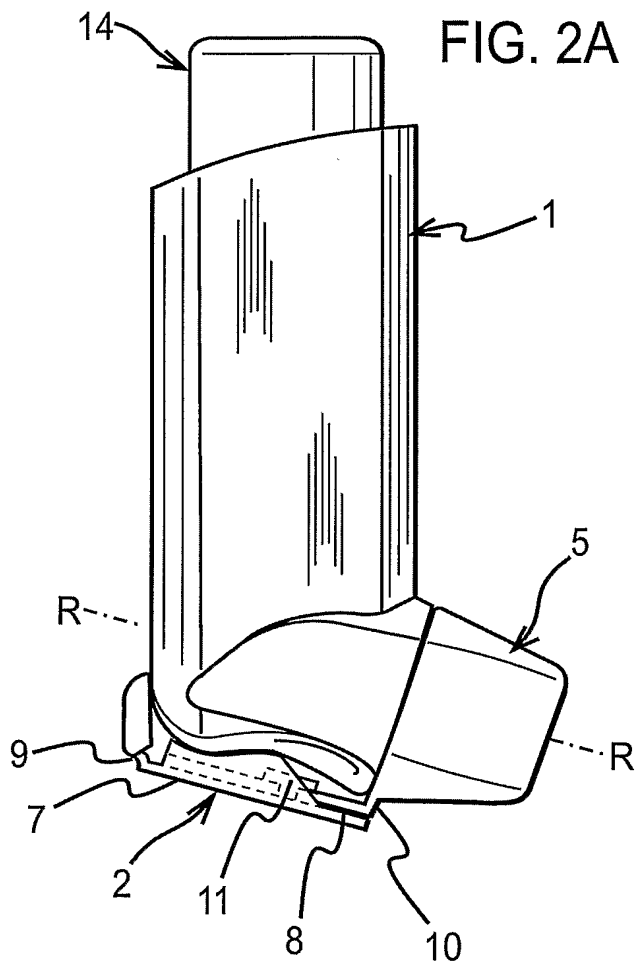


FIG. 2C

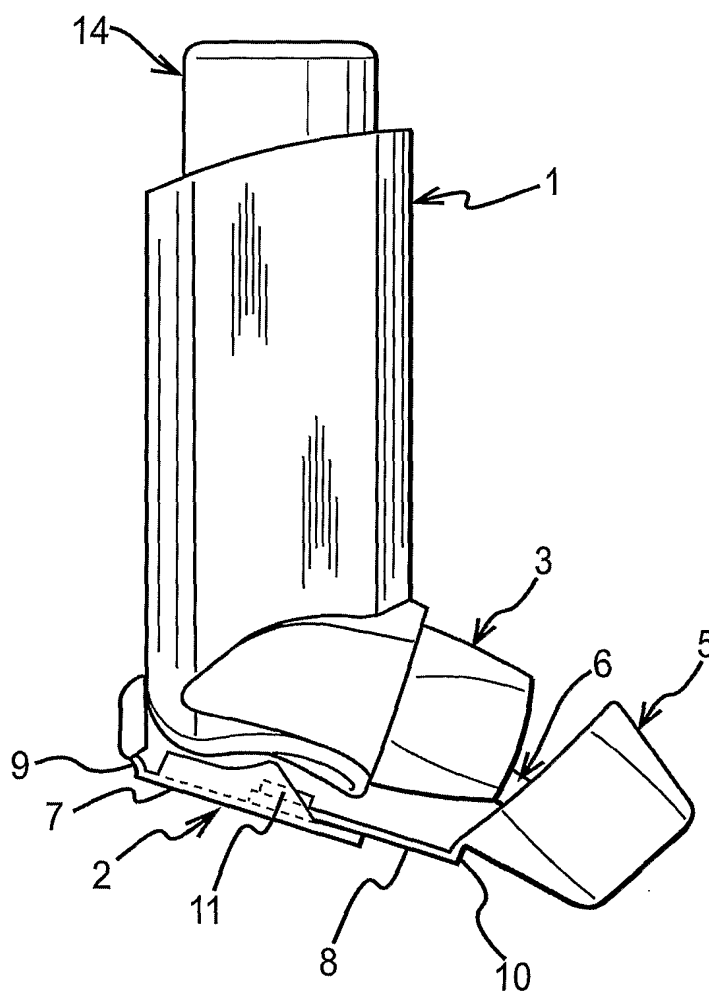


FIG. 2D

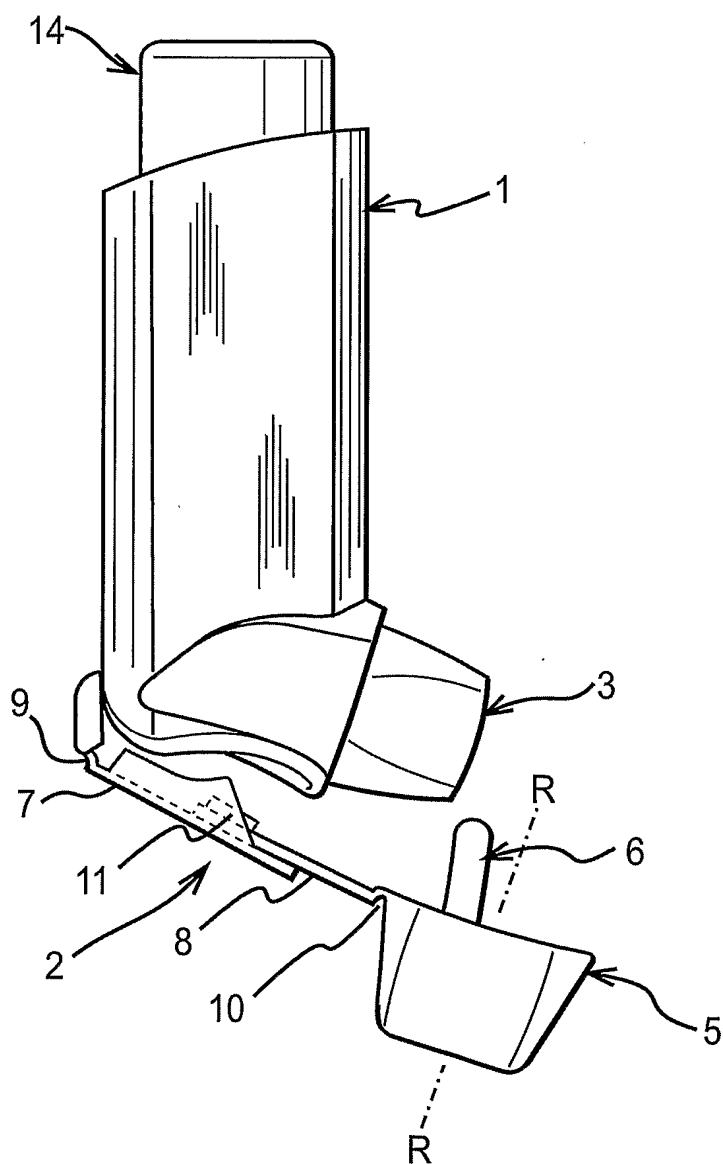


FIG. 3A

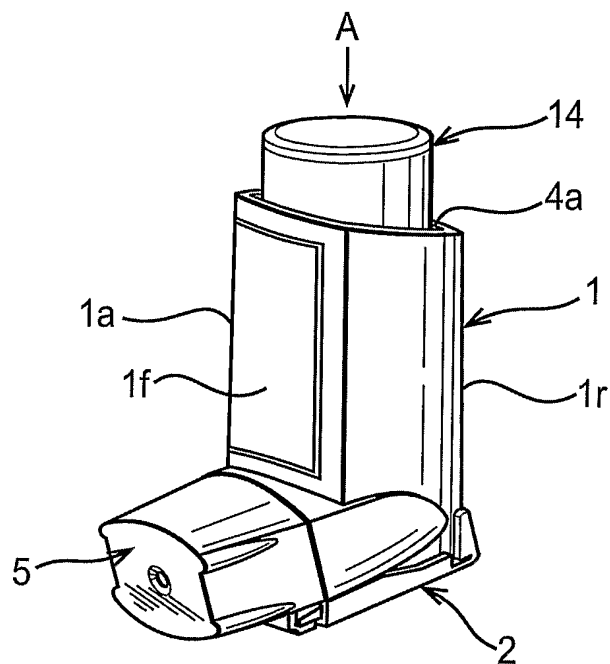


FIG. 3B

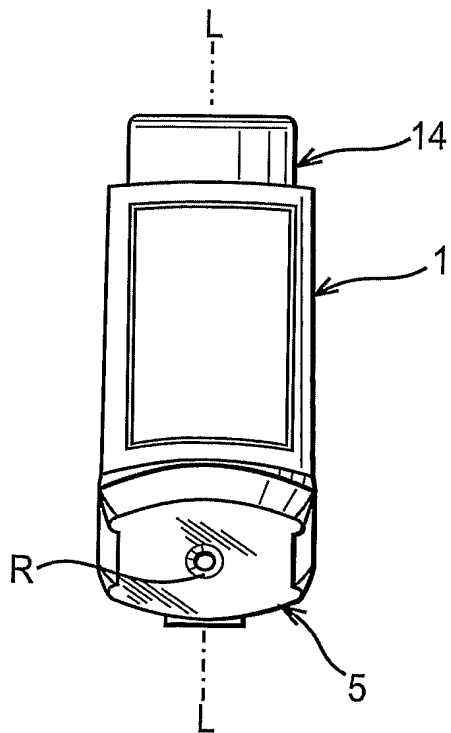


FIG. 3C

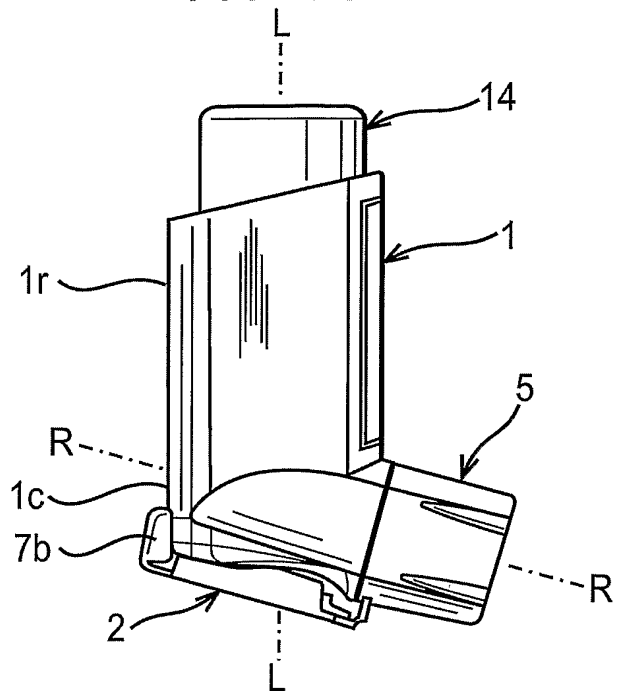


FIG. 3D

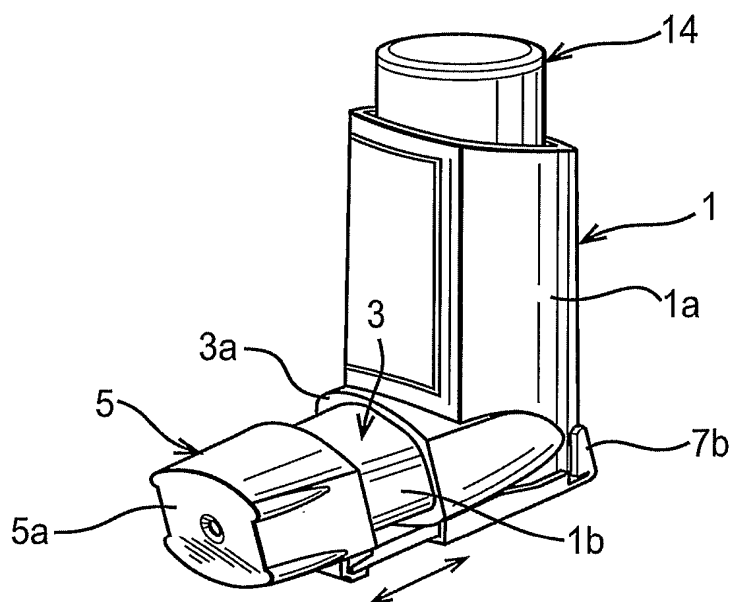






FIG. 3F

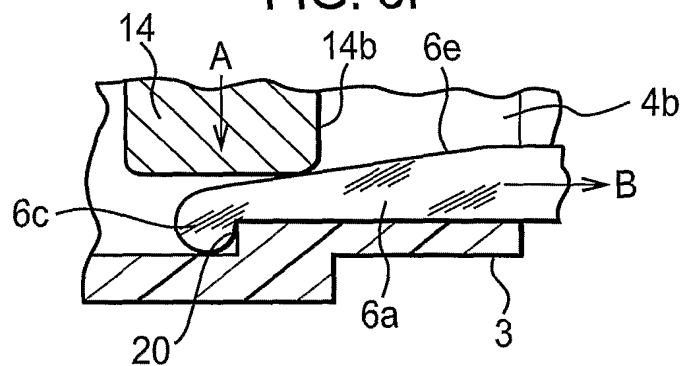
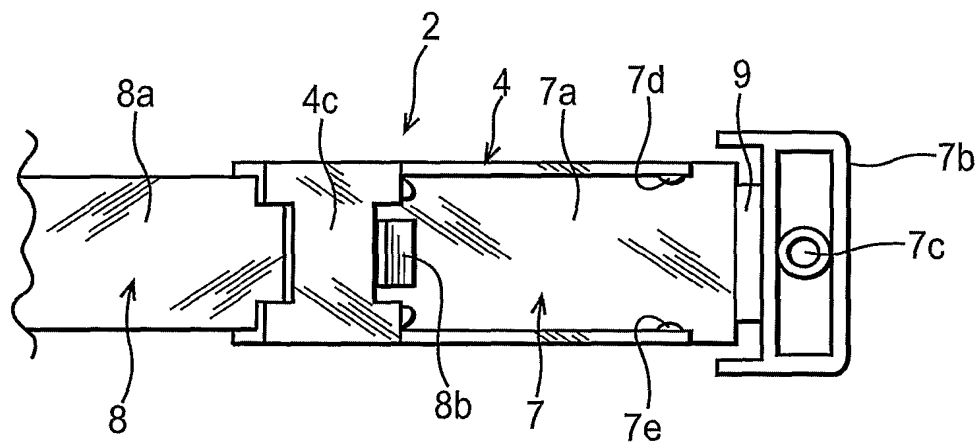
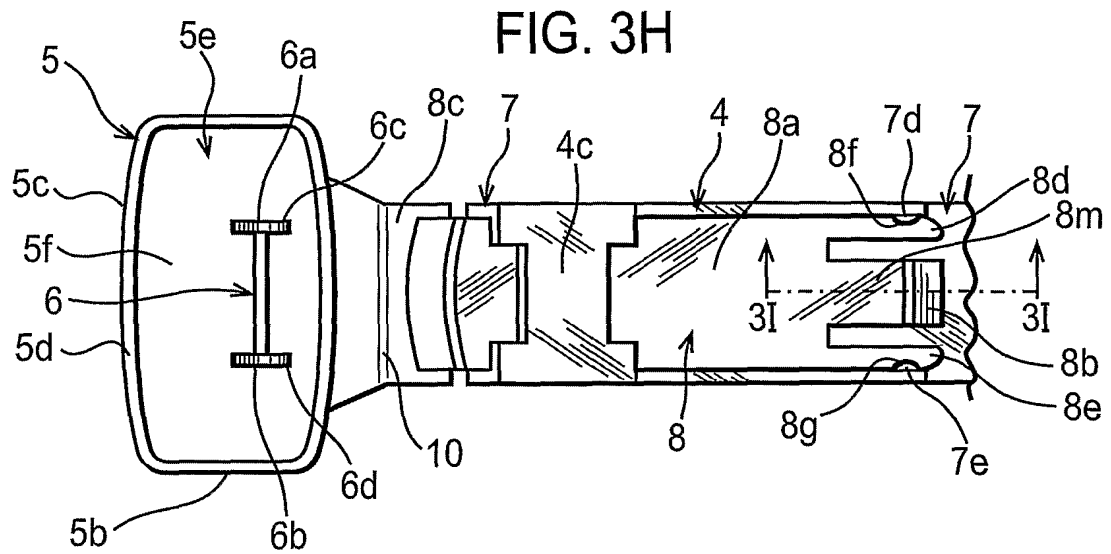



FIG. 3G





**FIG. 3I**



**FIG. 3J**

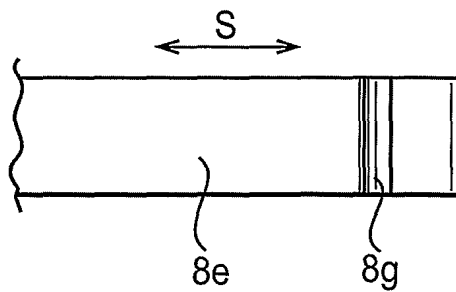


FIG. 3K

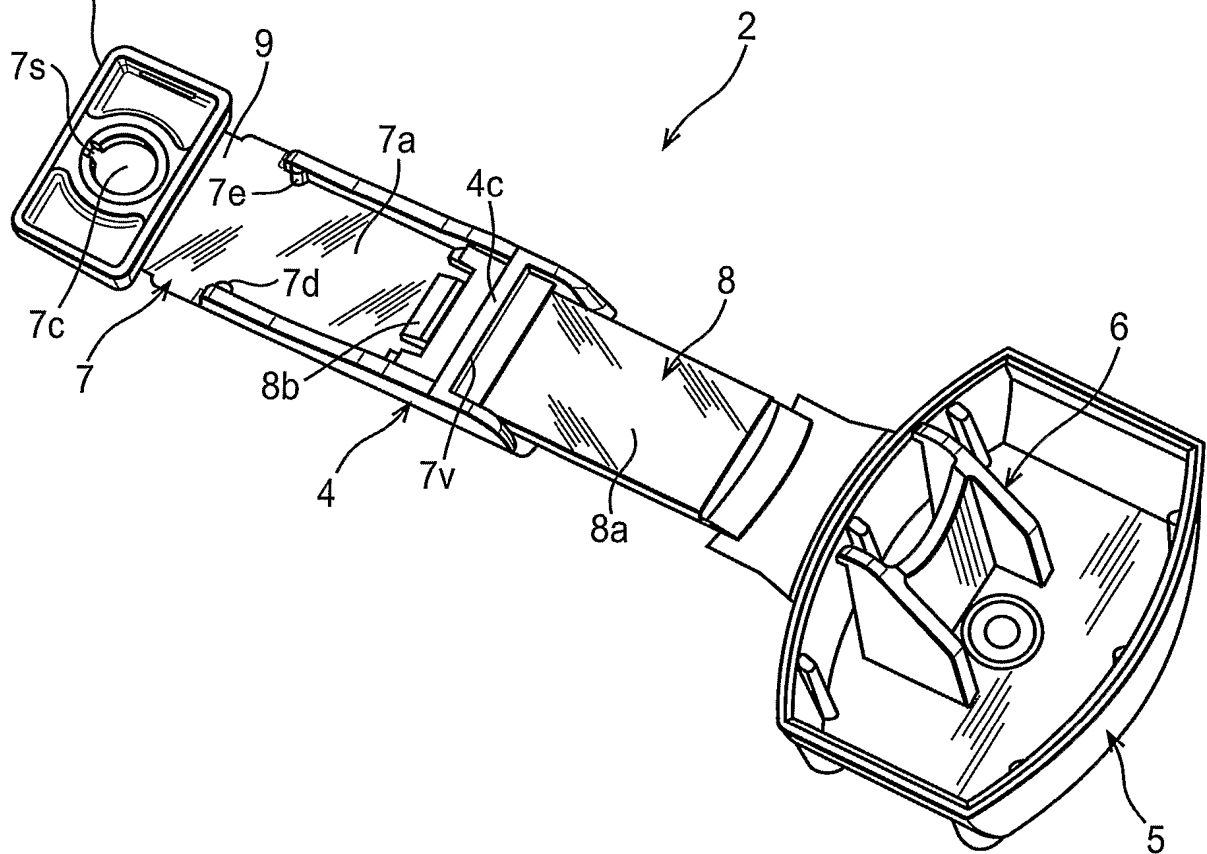


FIG. 3L

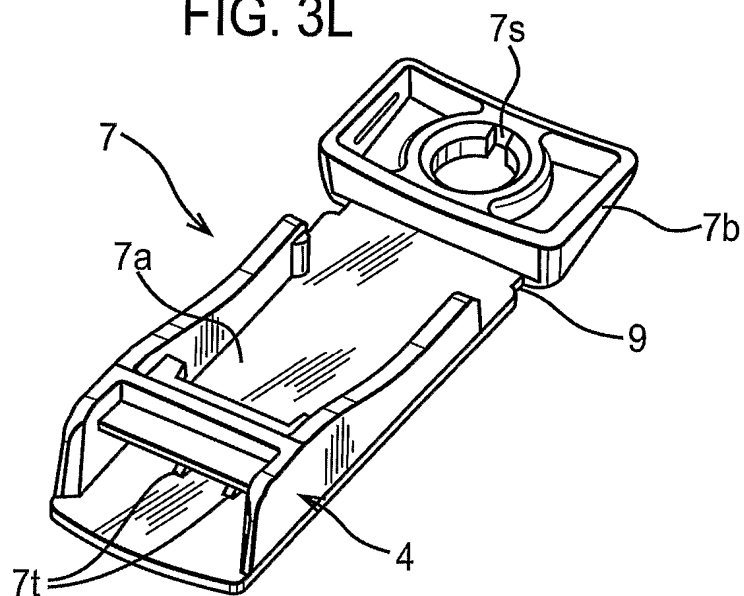


FIG. 3M

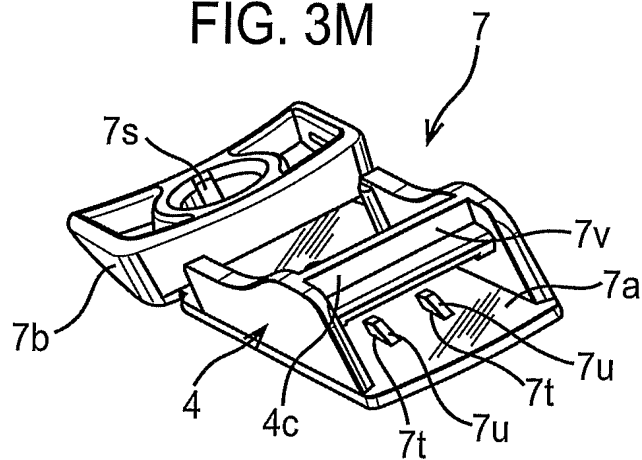


FIG. 4A

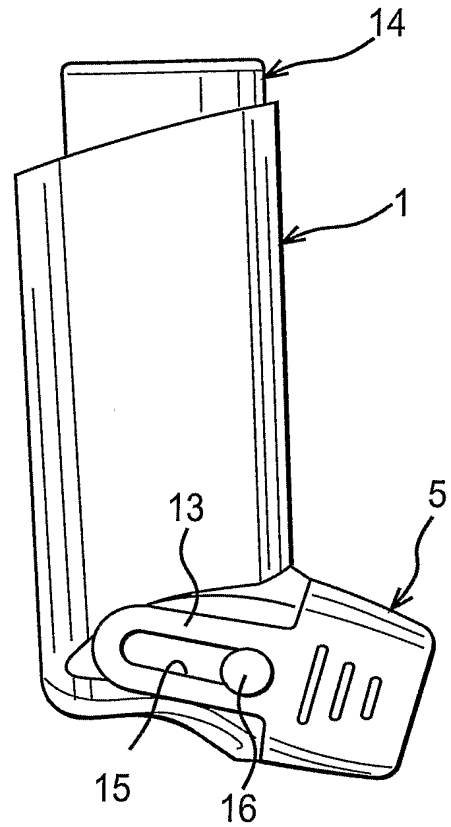


FIG. 4B

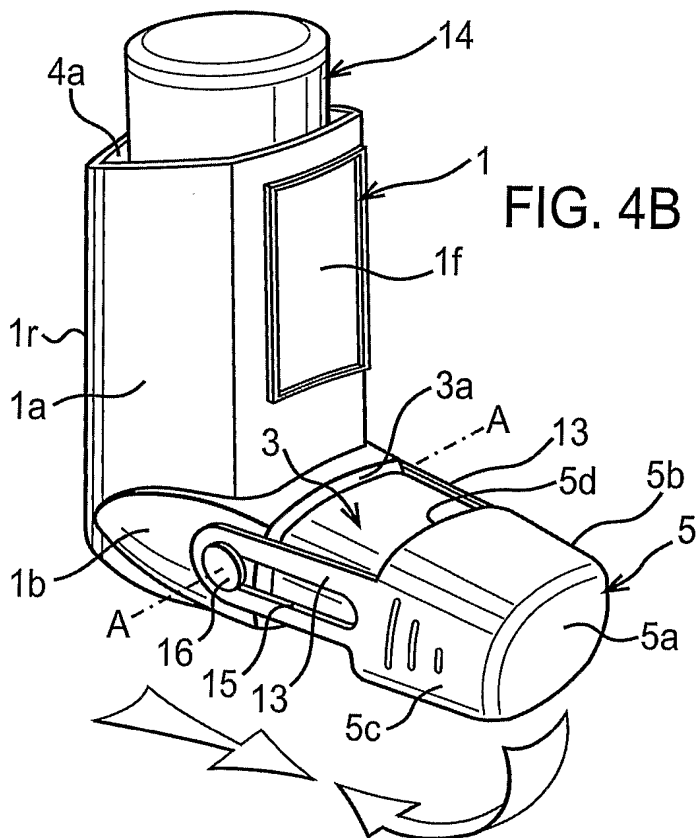


FIG. 5

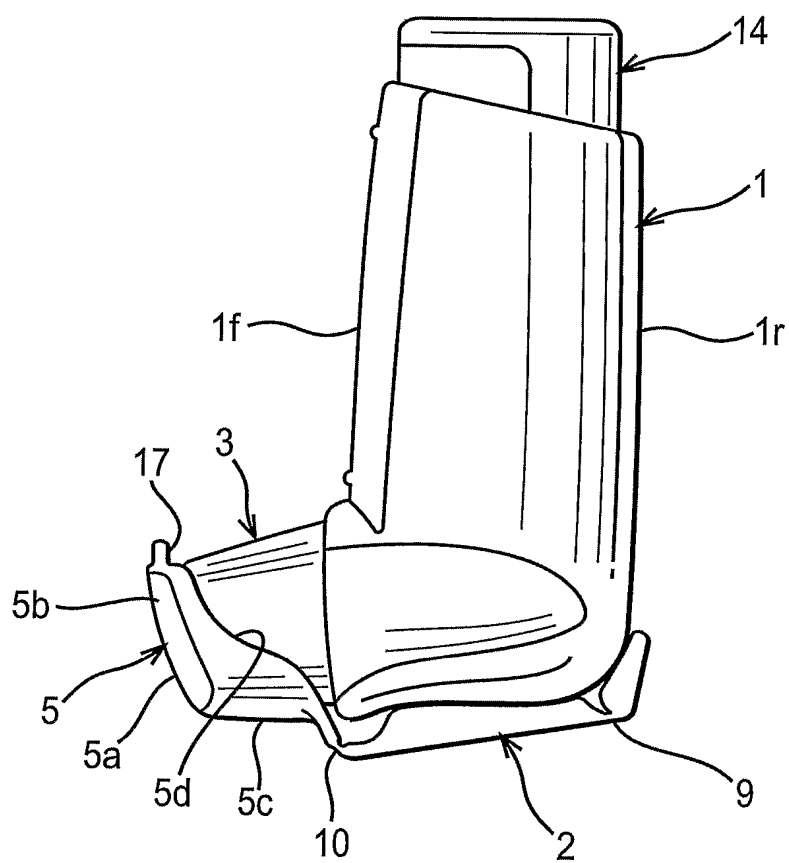


FIG. 6

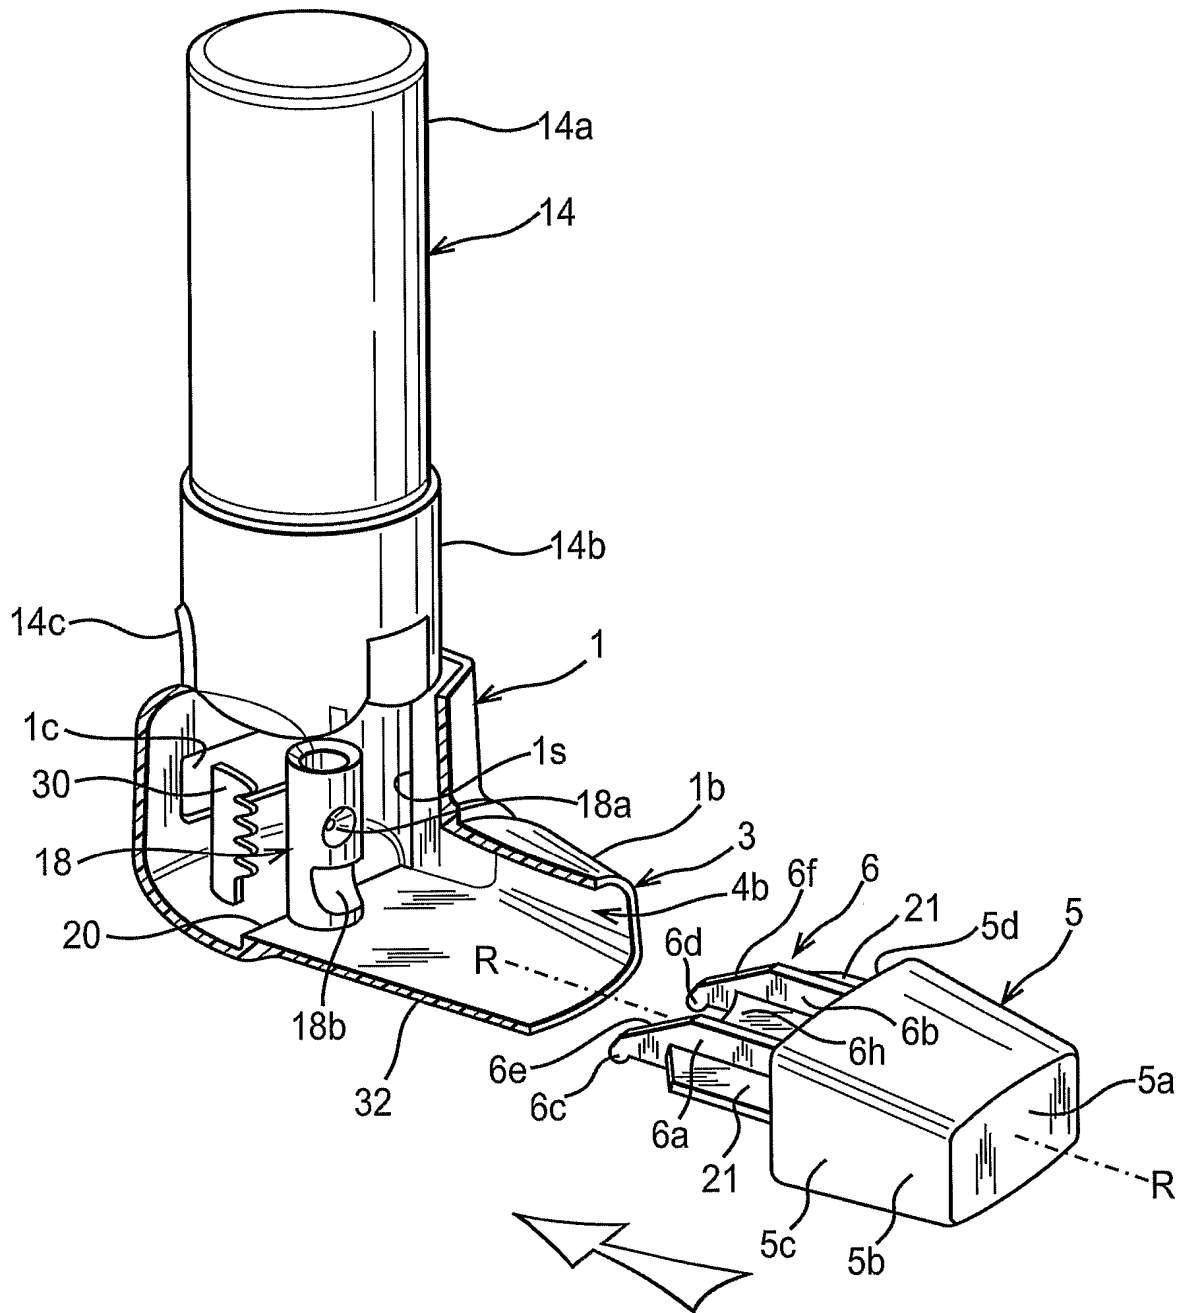




FIG. 6A

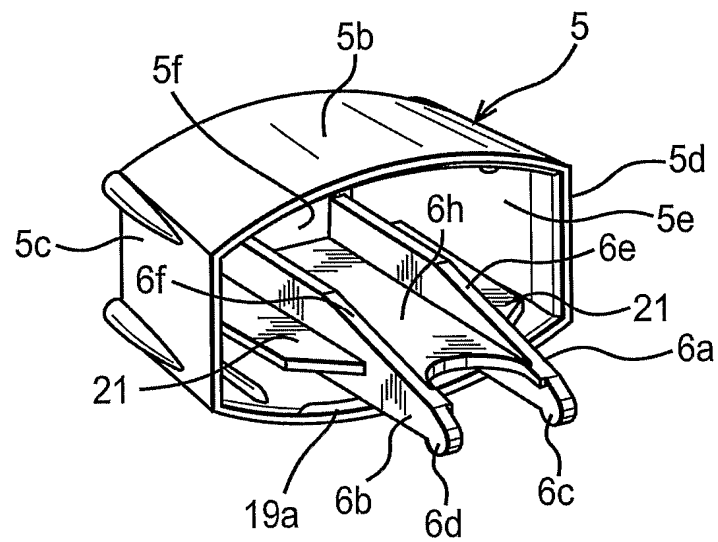


FIG. 6B

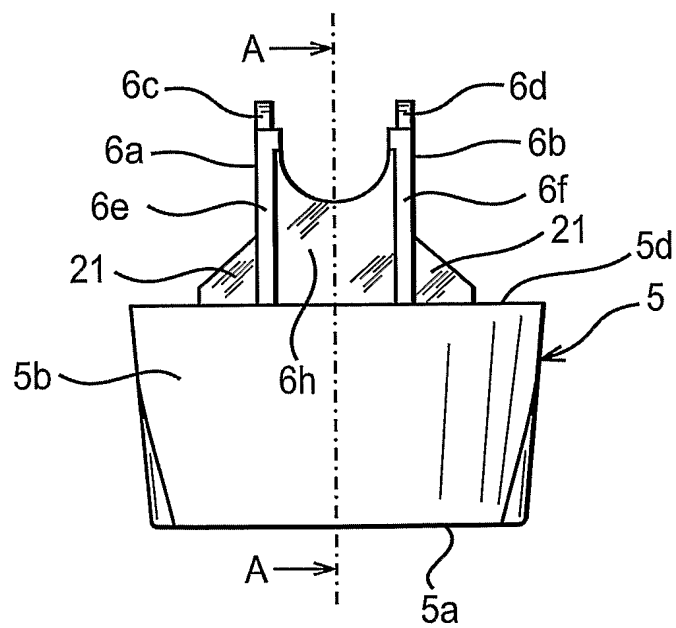


FIG. 6C

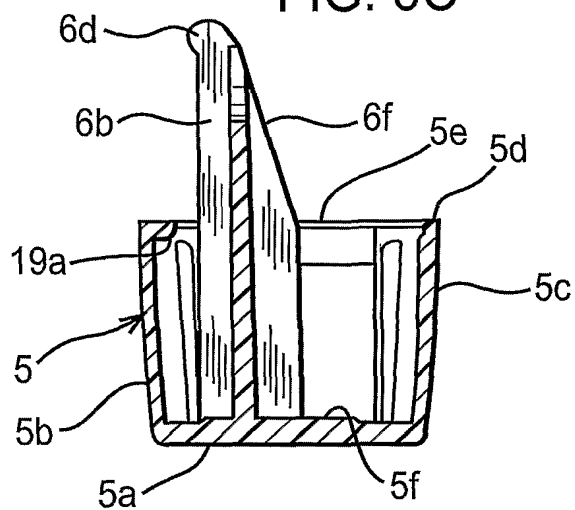


FIG. 6D

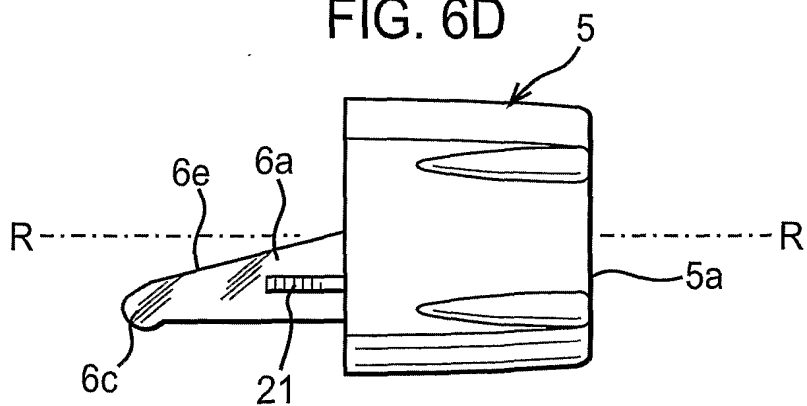


FIG. 6E

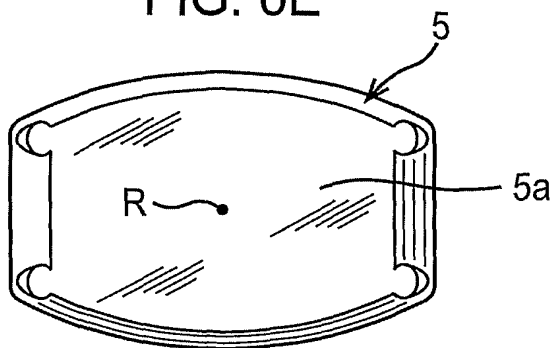




FIG. 6G

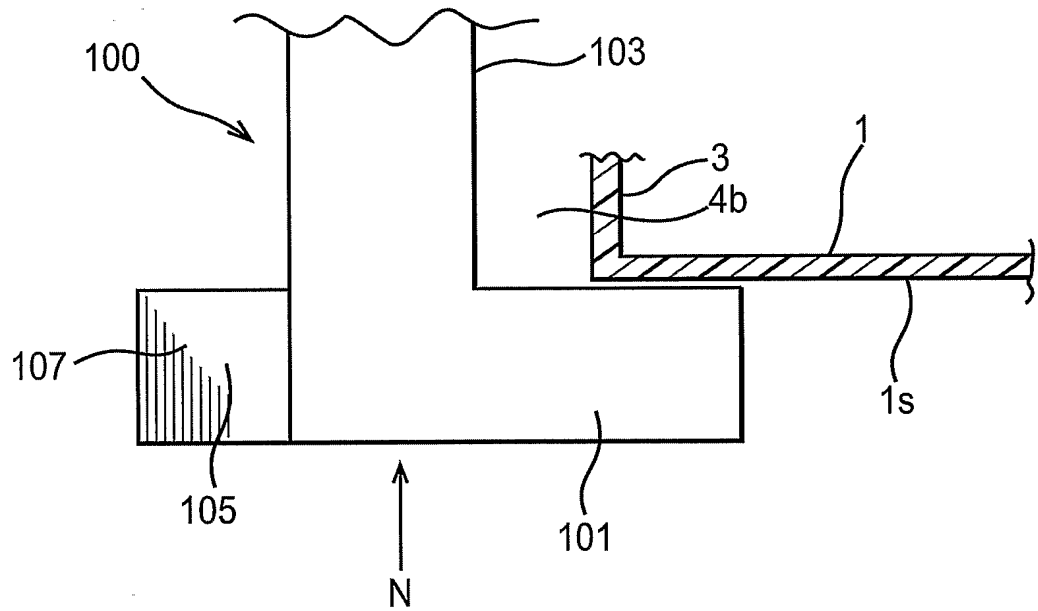


FIG. 6H

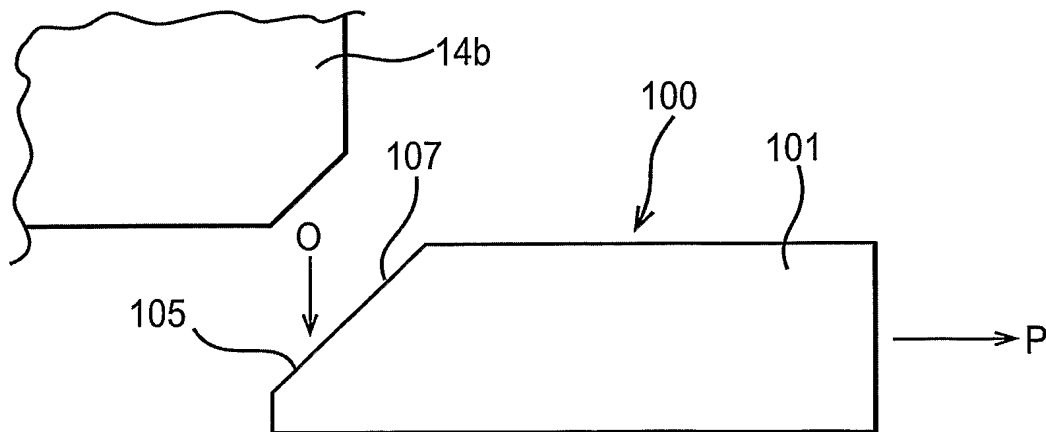


FIG. 7A

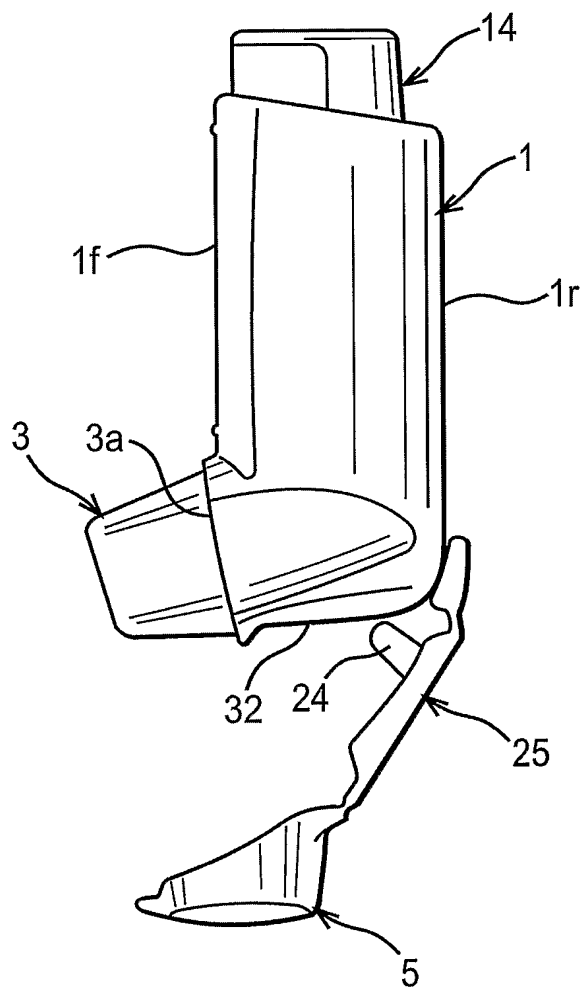
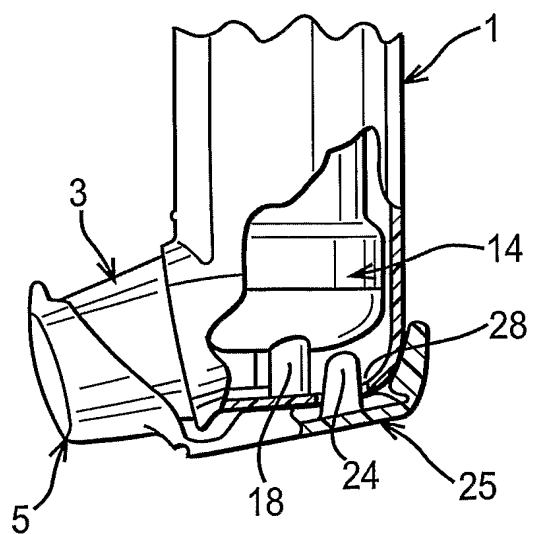
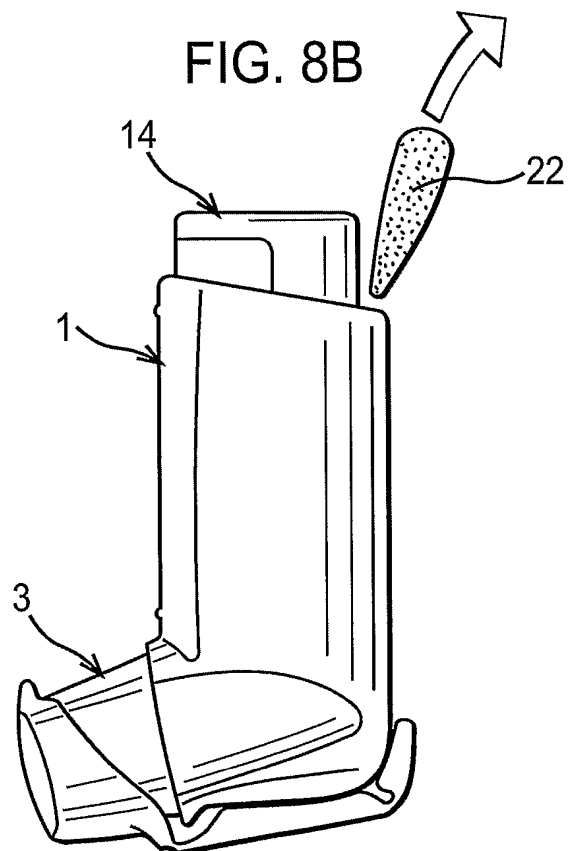
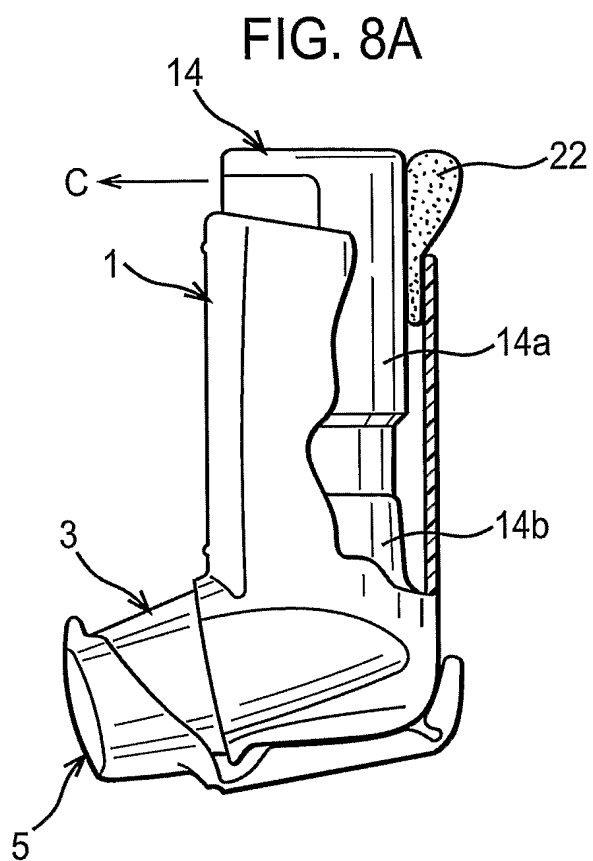


FIG. 7B





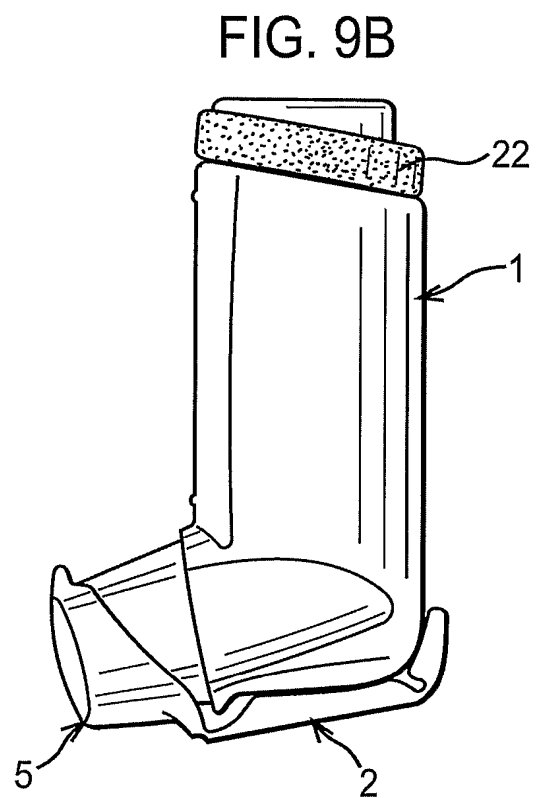
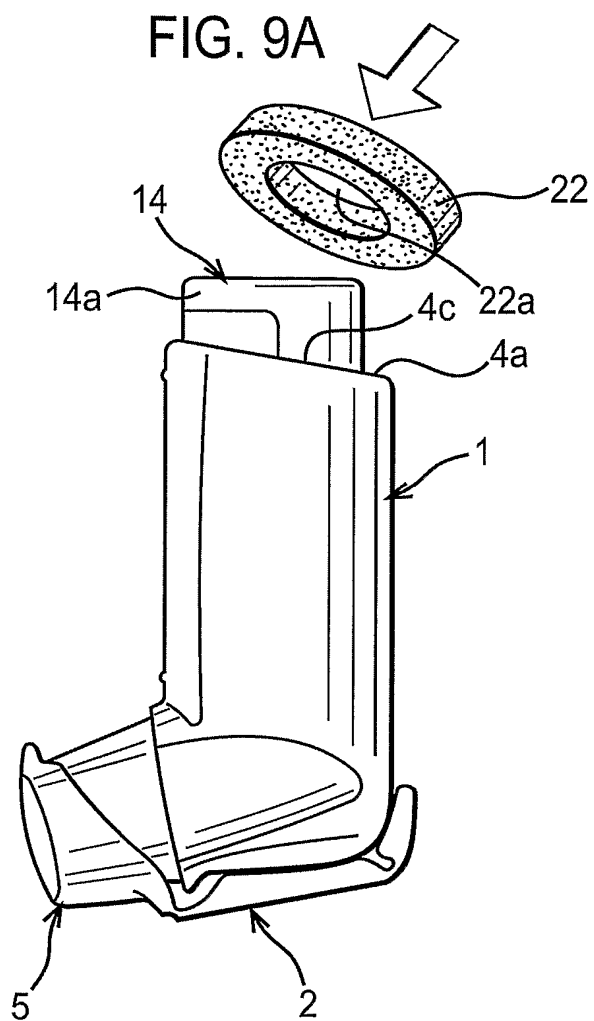


FIG. 10A

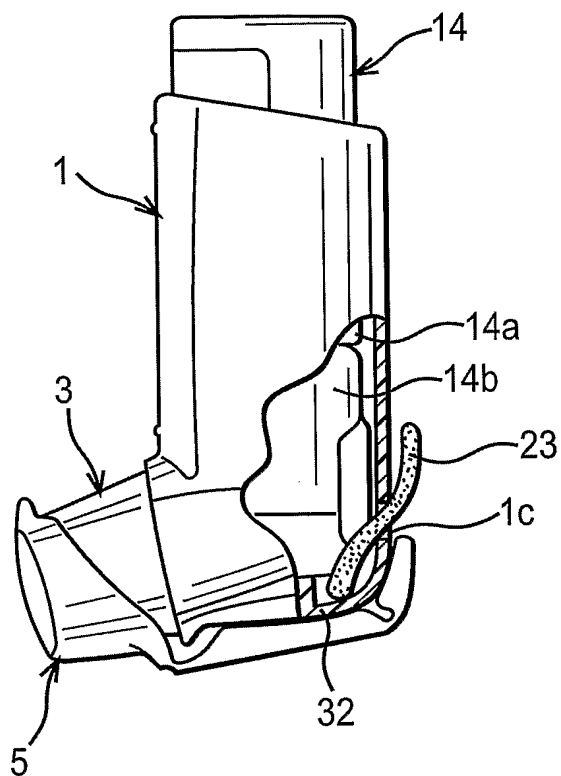


FIG. 10B

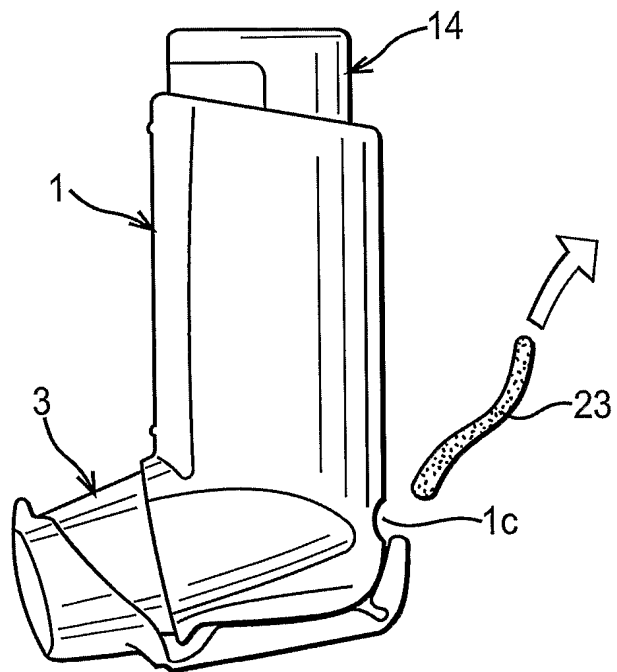




FIG. 11A

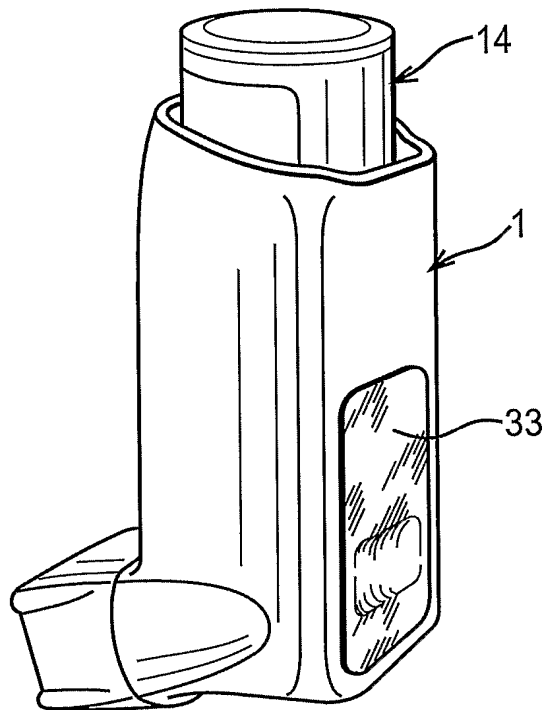


FIG. 11B

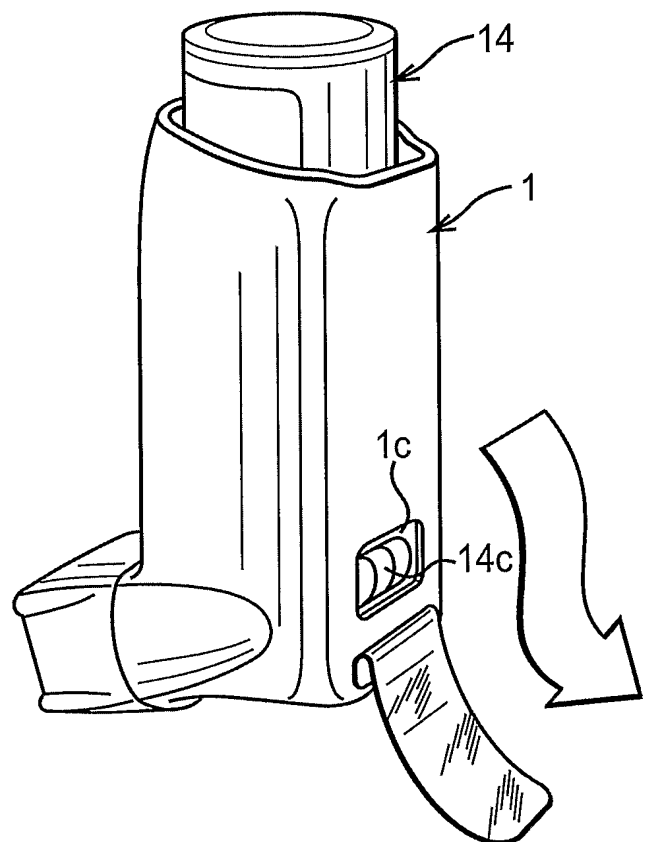


FIG. 12A

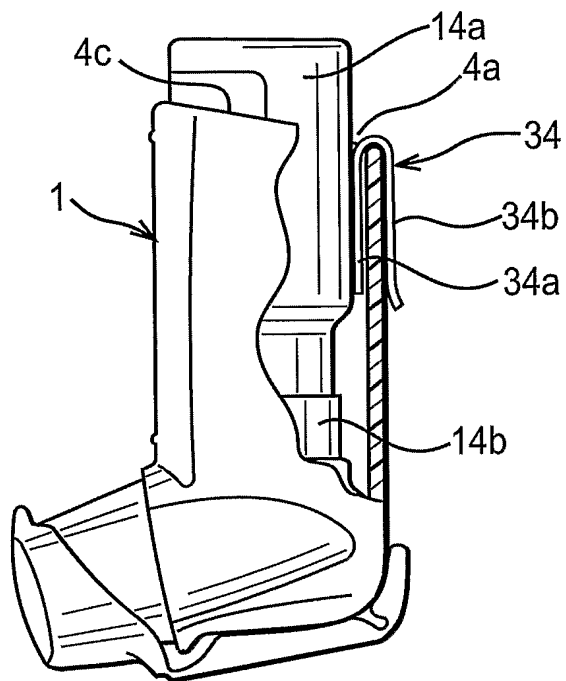


FIG. 12B

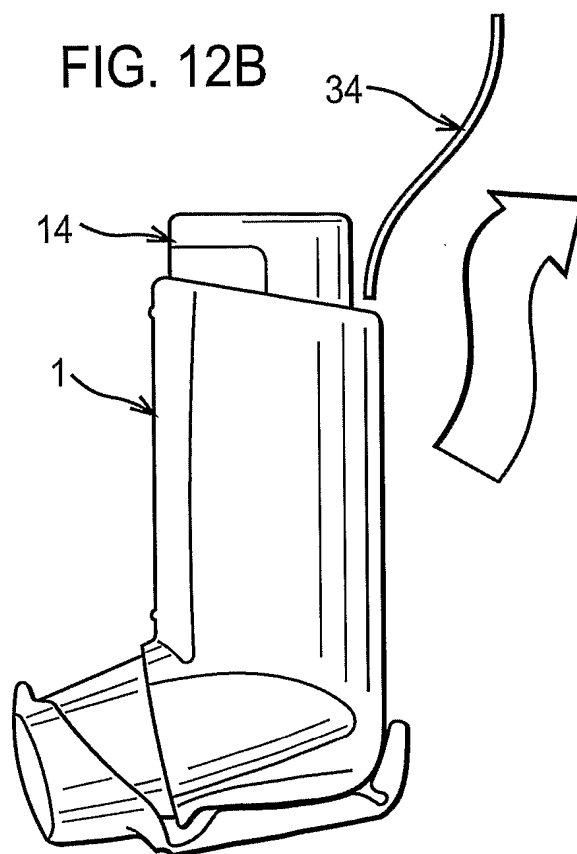


FIG. 13A

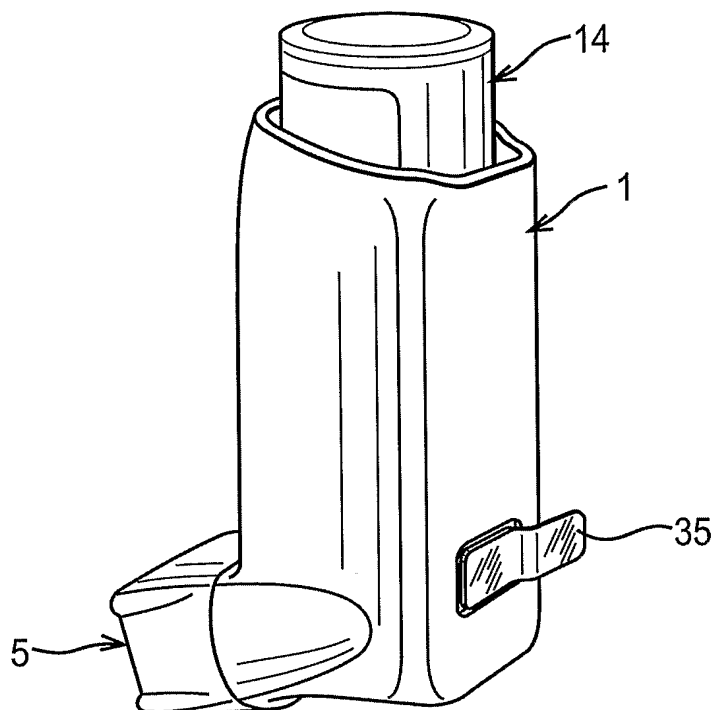


FIG. 13B

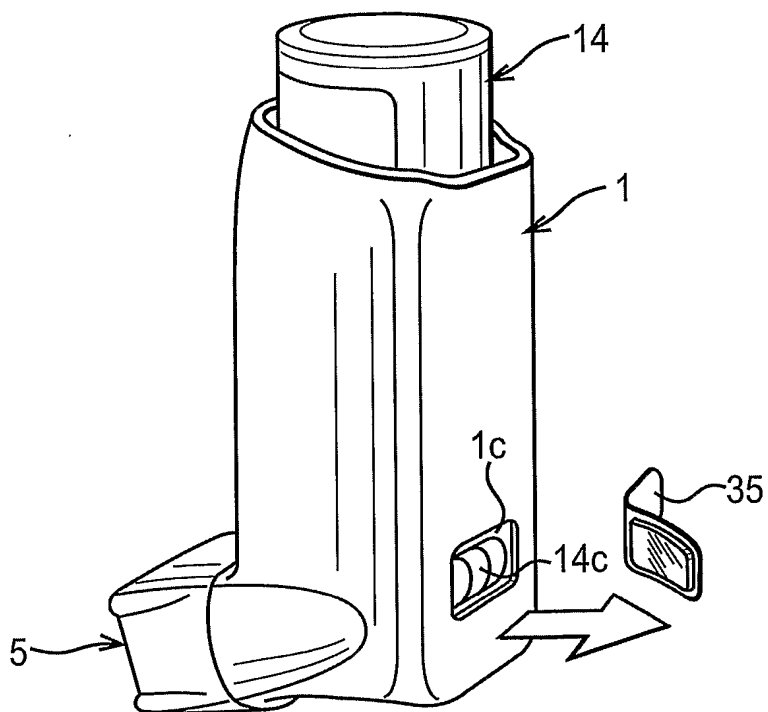


FIG. 14A

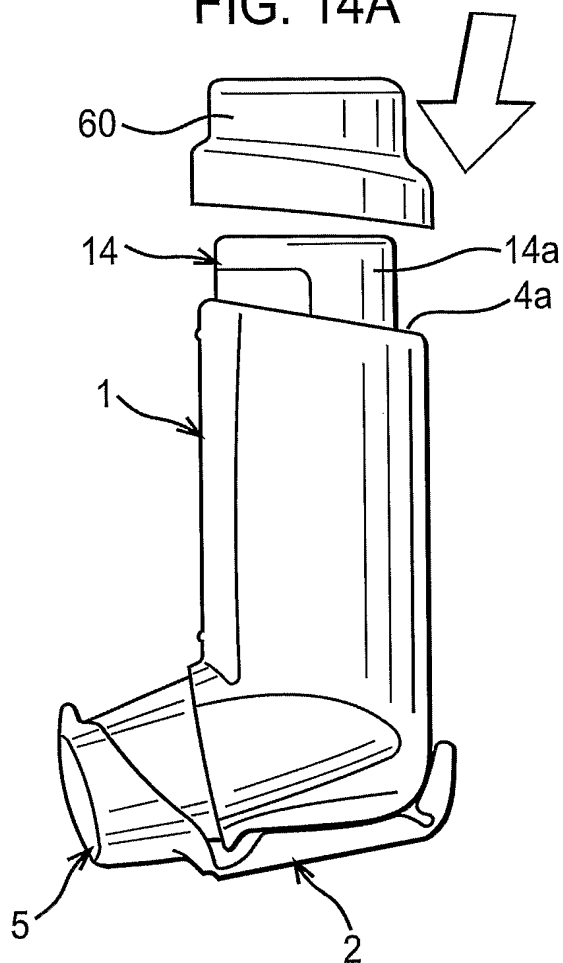


FIG. 14B

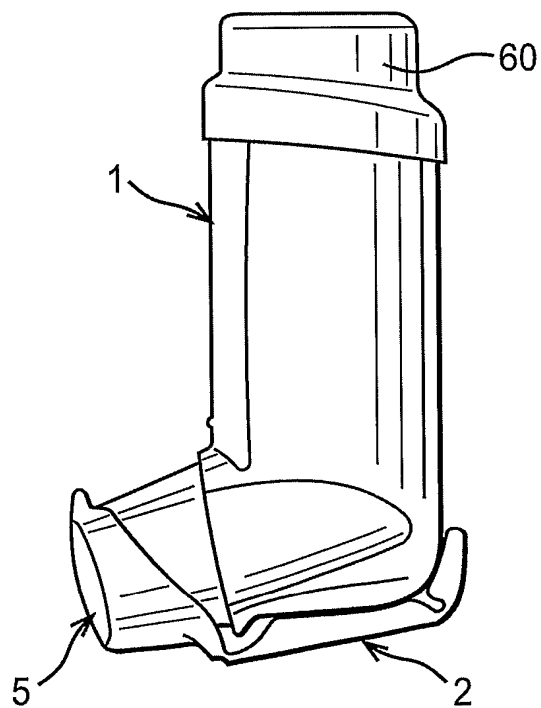


FIG. 15A

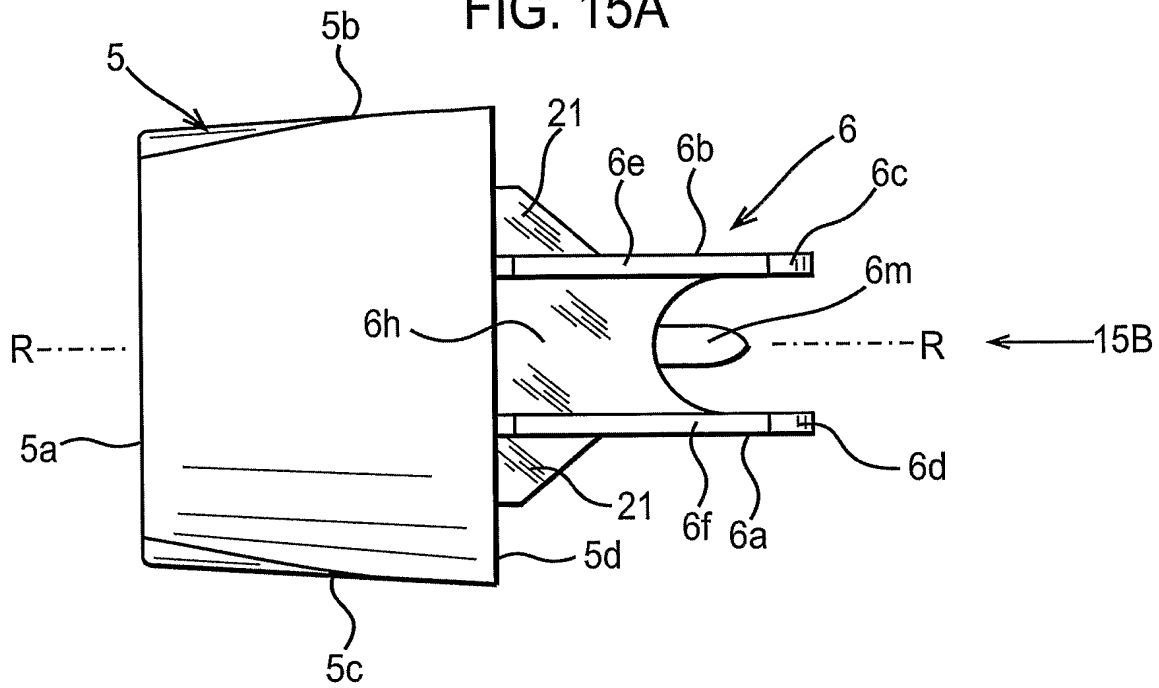


FIG. 15B

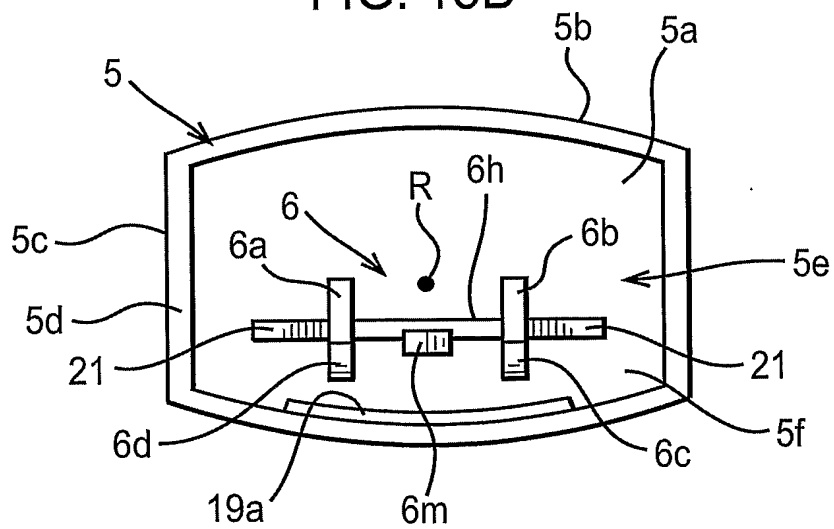


FIG. 16A

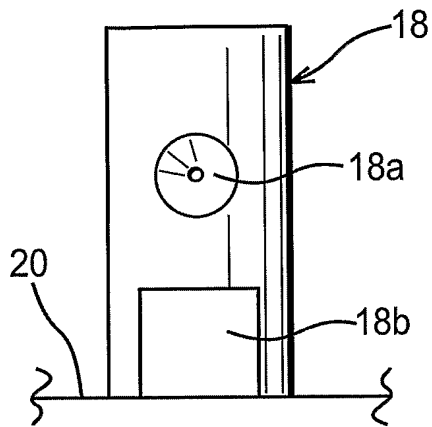


FIG. 16B

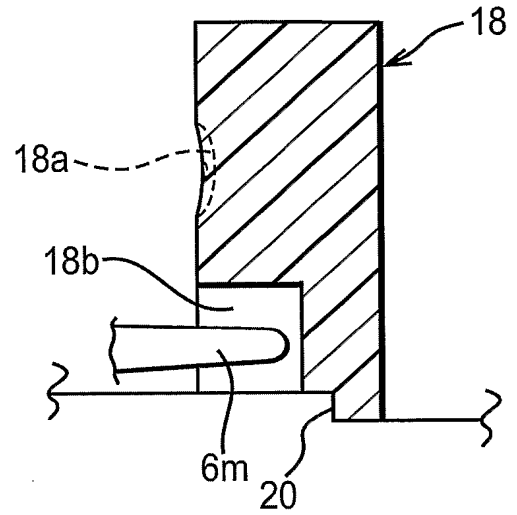


FIG. 16C

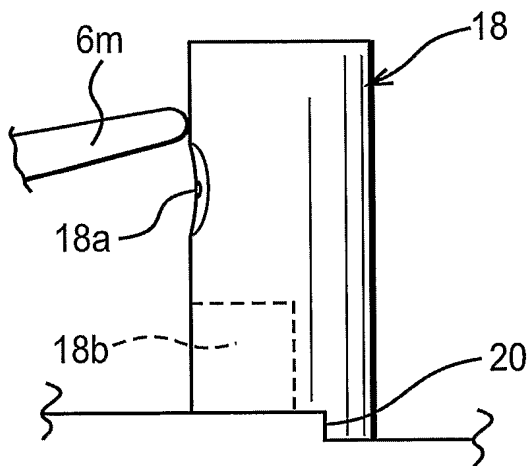


FIG. 16D

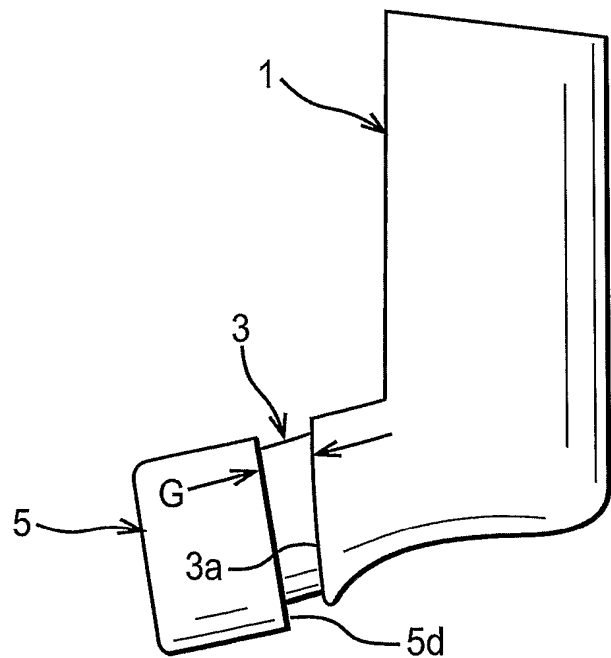


FIG. 17A

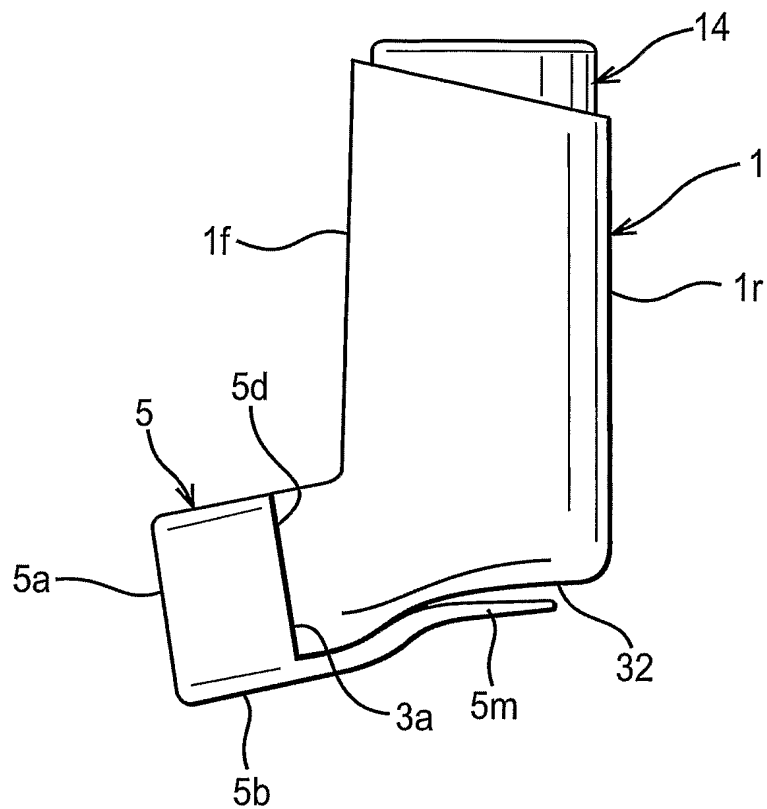


FIG. 17B

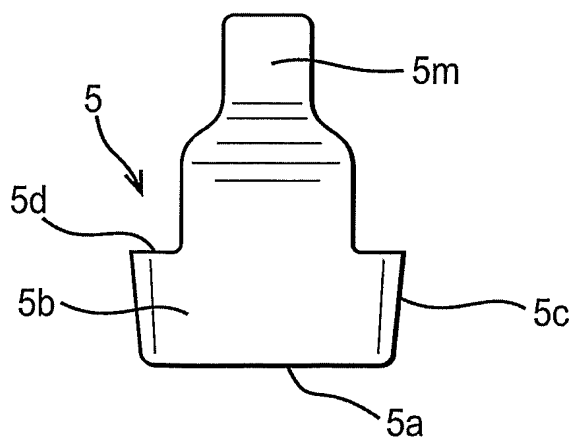


FIG. 18A

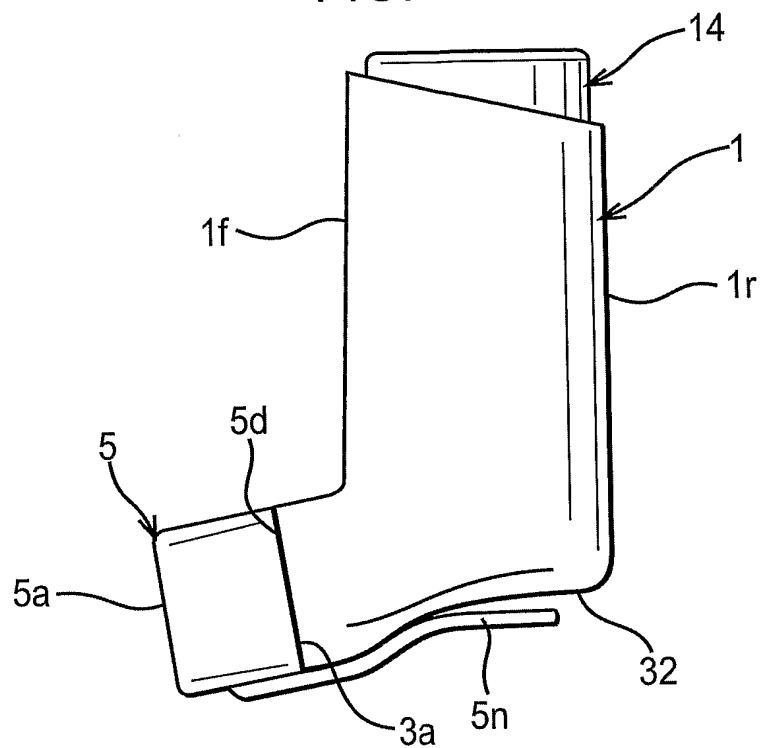


FIG. 18B

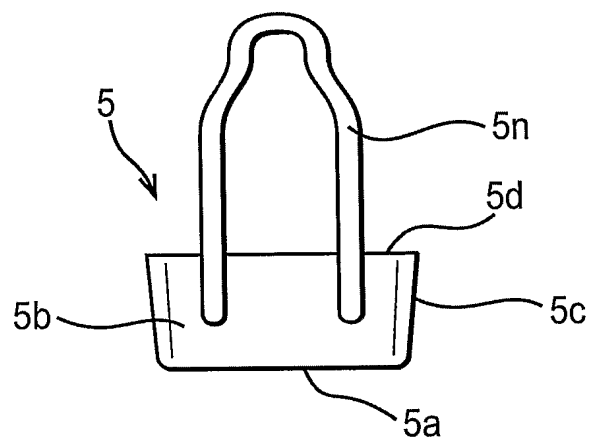




FIG. 19A

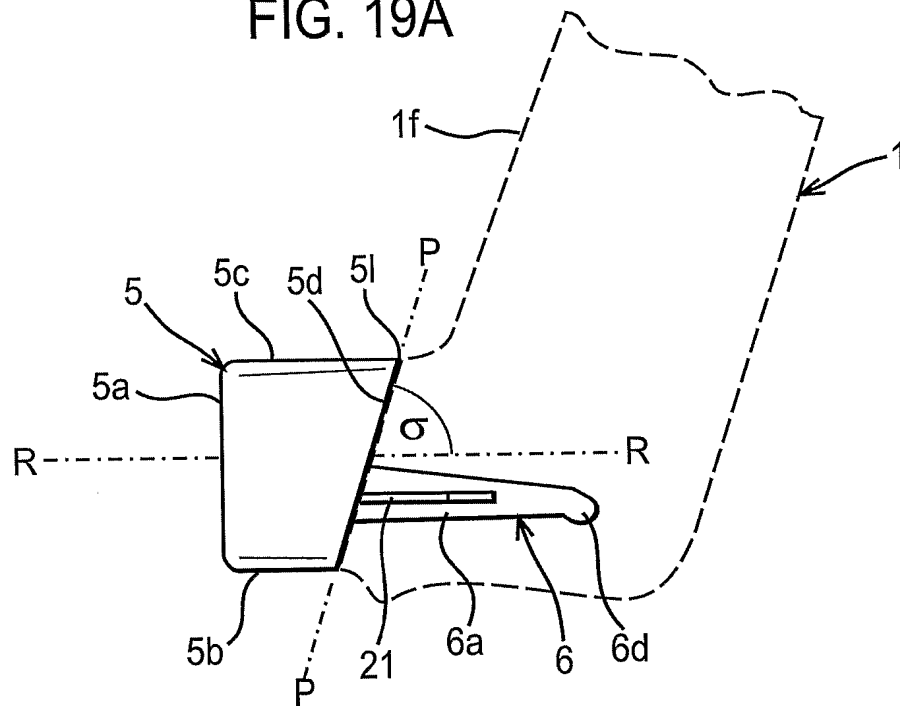
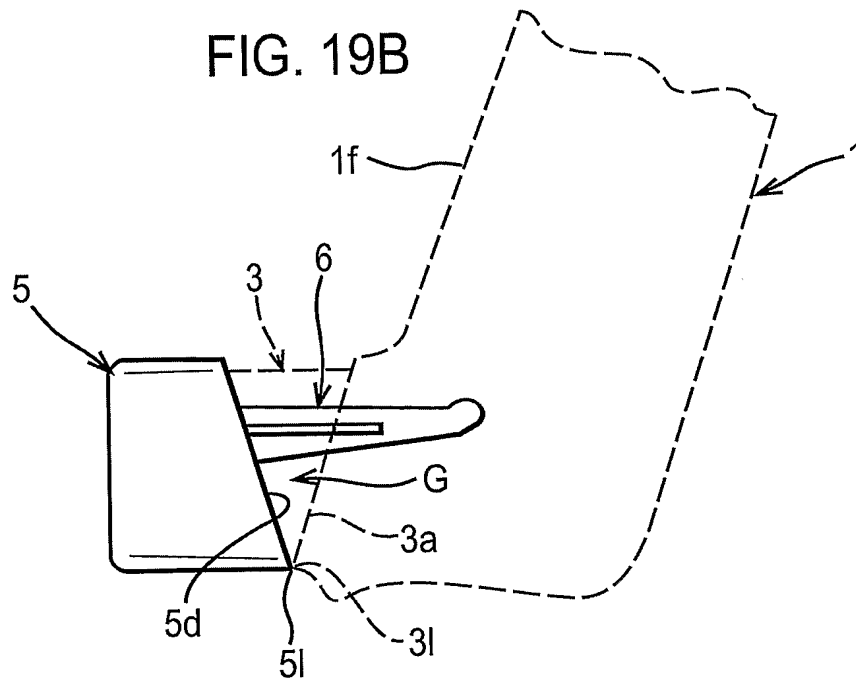


FIG. 19B



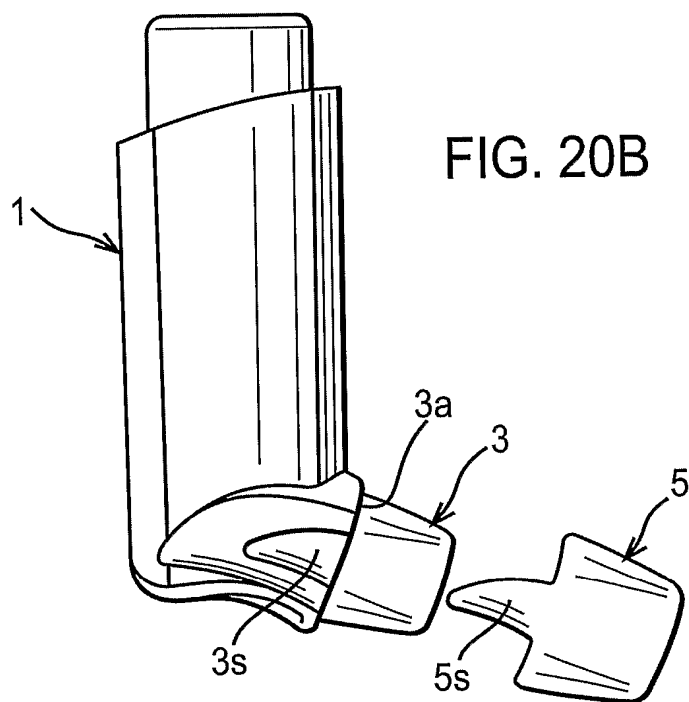
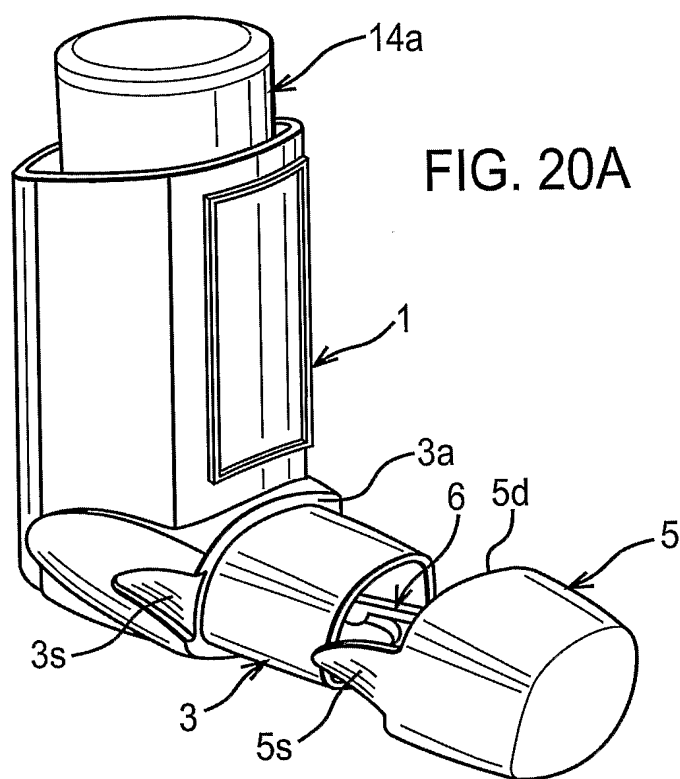


FIG. 21A





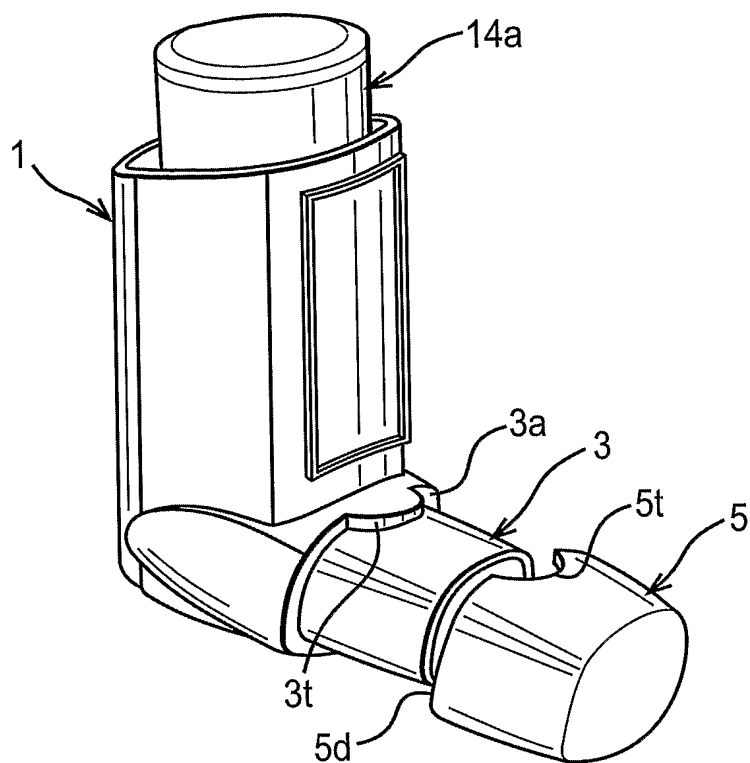


FIG. 21B

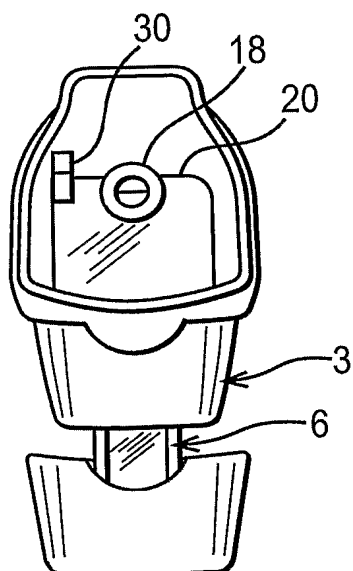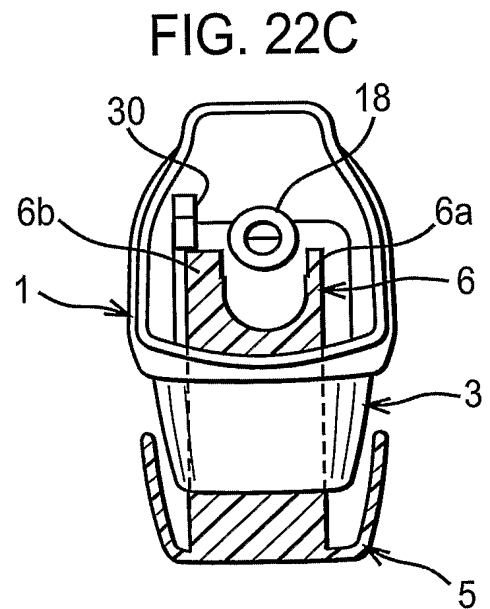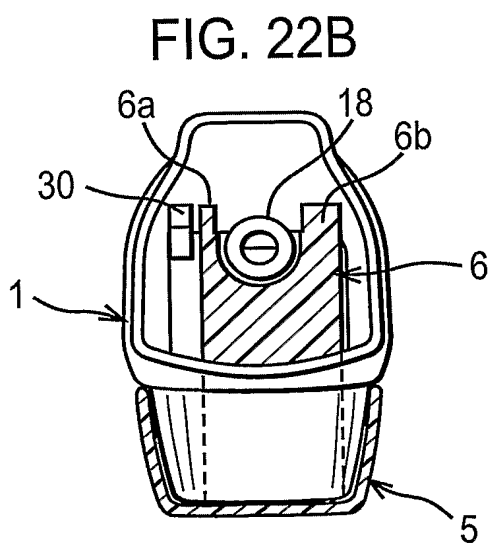

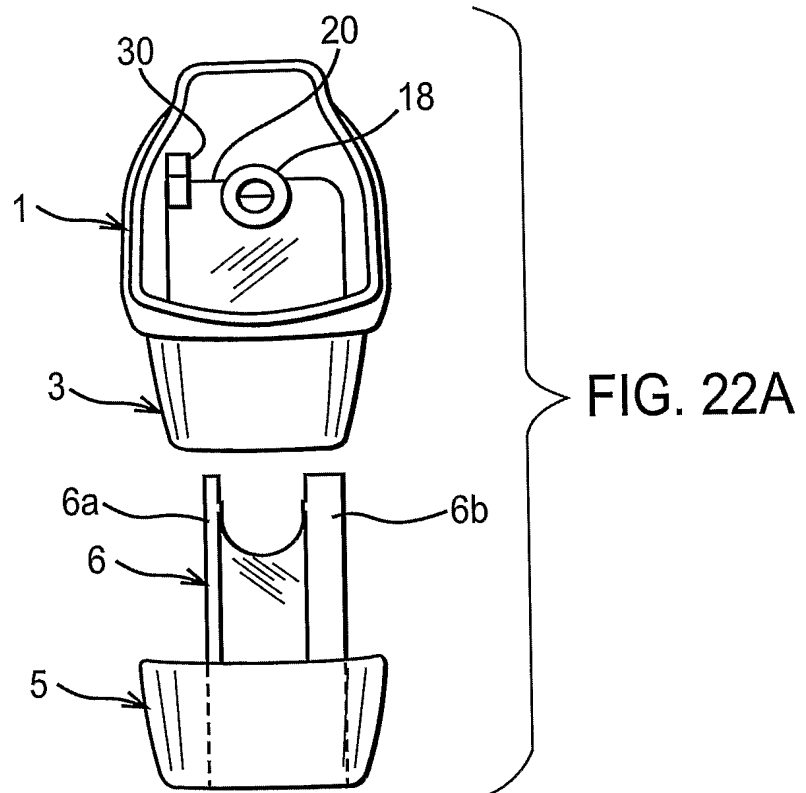

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/GB2005/000926

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A61M15/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61M B65D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3 622 053 A (JOHN V. RYDEN) 23 November 1971 (1971-11-23)	1-6, 8-11, 13, 17, 26, 27, 32, 33, 72-78
Y	column 3, line 20 - line 24; figure 2 abstract	22-24, 28, 30, 31
Y	WO 2004/001664 A (GLAXO GROUP LIMITED; BONNEY, STANLEY, GEORGE; BRAND, PETER, JOHN; GODF) 31 December 2003 (2003-12-31) cited in the application the whole document	22-24, 28, 30, 31
A	US 3 927 806 A (MESHBERG ET AL) 23 December 1975 (1975-12-23) figure 2	1, 34-42
	----- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

9 June 2005

Date of mailing of the international search report

29.08.2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Valfort, C

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/GB2005/000926

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3 429 310 A (MARTIN A. JAFFE ET AL) 25 February 1969 (1969-02-25) the whole document	1-42, 72-78
X	GB 1 044 627 A (BENGER LABORATORIES LIMITED) 5 October 1966 (1966-10-05)	1-6, 8-13, 16-21, 26,27, 32, 72-81,84
Y	the whole document	85-91, 105
X	US 3 191 867 A (HELMS W. LEE) 29 June 1965 (1965-06-29)	43, 45-47, 50,51
Y	abstract; figures	89-91
X	GB 2 364 320 A (* BESPAC PLC) 23 January 2002 (2002-01-23)	43,48, 49,89,90
Y	page 7, line 19; figures 1,2a-2c	88
X	US 5 899 200 A (MCNARY ET AL) 4 May 1999 (1999-05-04)	43
Y	figures	134-154
X	DE 298 18 662 U1 (JOSEF WISCHERATH GMBH & CO. KG) 2 March 2000 (2000-03-02) abstract; figures	43,92-95
X	US 4 940 051 A (LANKINEN ET AL) 10 July 1990 (1990-07-10) column 3, line 14 - line 19; figure 1	71
P,X	WO 2004/064906 A (LANGFORD, STANLEY, C) 5 August 2004 (2004-08-05)	52,54, 56-58, 60,62, 69,70
P,A	abstract; figures	53,55, 59,63-68
X	US 4 641 644 A (ANDERSSON ET AL) 10 February 1987 (1987-02-10) abstract; figures	43,44,91
X	WO 99/38555 A (GOLDSTEIN & LEWIN TECHNOLOGY GMBH; GOLDEMANN, RAUL; SCHWARZWALD, DETLE) 5 August 1999 (1999-08-05)	43,44,91
Y	page 8, line 8 - line 22; figures page 15, line 10 - line 18; figure 6	134-154
	-/--	

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB2005/000926

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,X	WO 2004/089782 A (S. C. JOHNSON & SON, INC; FURNER, PAUL, E; NELSON, CORY, J) 21 October 2004 (2004-10-21)	52,54, 57,58, 62,69,70
P,A	paragraph '0044! - paragraph '0047!; figures	53,55, 59,63-68
A	----- ANONYMOUS: "Canister retention feature for inhalation device" RESEARCH DISCLOSURE, KENNETH MASON PUBLICATIONS, WESTBOURNE, GB, vol. 370, no. 34, February 1995 (1995-02), XP007120212 ISSN: 0374-4353 the whole document	52-70
E	----- WO 2005/046774 A (ASTRAZENECA AB; BUNCE, MARTIN) 26 May 2005 (2005-05-26) abstract; figures	134-154
X	----- US 3 549 055 A (LAWRENCE O. GATLAND) 22 December 1970 (1970-12-22)	96-104, 106-112
Y	column 3, line 35 - line 40; figure 1	105
X	----- WO 91/06333 A (NOVO NORDISK A/S) 16 May 1991 (1991-05-16) abstract; figure 1	96,110, 112
X	----- US 3 826 413 A (WARREN W,GB) 30 July 1974 (1974-07-30) figure 1	96, 110-112
X	----- WO 97/06842 A (PHARMASOL LIMITED; OPPERMAN, NICHOLAS, RICHARD, JAMES) 27 February 1997 (1997-02-27)	52,54, 57,58,62
Y	page 5, last paragraph; figures 1,2,5 page 8, paragraph 1	85-87
	-----	

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/GB2005/000926

## Box II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☒ Claims Nos.: 155-157  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:  
see FURTHER INFORMATION sheet PCT/ISA/210
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☒ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

### Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☒ No protest accompanied the payment of additional search fees.



## FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-42,72-78

An inhaler with a closure having a restricting member for preventing unintentional actuation of the inhaler.

2. claims: 43-51,89-91

Inhaler with a housing an a closure with an extendible connector part.

3. claims: 52-61

An inhaler with a restricting member fastened to the canister unit.

4. claims: 62-70

An inhaler with a restricting member which is inserted between the dispensing member and the housing.

5. claim: 71

An inhaler with a restricting means which restricts movement between the dispensing member and the housing and prevents removal of the dispensing member from the housing.

6. claims: 79-88

An accessory for use with an inhaler, the accessory having a restricting member for preventing dispensing the dose when attached to the inhaler.

7. claims: 92-95

A connector for connecting an accessory to an inhaler, the connector having a restricting member.

8. claims: 96-133

A dispensing device with a housing and a closure comprising a cap and a feature for insuring correct orientation of the closure to the user and a closure with a cap having an extension for engaging a dispensing device and indicating incorrect orientation of the cap on the device..

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

9. claims: 134-154

A dust cap for a pMDI with a strap part, the cap being  
slidable on the strap part.  
---

## FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

Continuation of Box II.2

Claims Nos.: 155-157

Claims 155-157 are referring solely on the figures, and do not have any technical features as such. Therefore no meaningful search can be carried out for said claims (Article 6 PCT).

The applicant's attention is drawn to the fact that claims relating to inventions in respect of which no international search report has been established need not be the subject of an international preliminary examination (Rule 66.1(e) PCT). The applicant is advised that the EPO policy when acting as an International Preliminary Examining Authority is normally not to carry out a preliminary examination on matter which has not been searched. This is the case irrespective of whether or not the claims are amended following receipt of the search report or during any Chapter II procedure. If the application proceeds into the regional phase before the EPO, the applicant is reminded that a search may be carried out during examination before the EPO (see EPO Guideline C-VI, 8.5), should the problems which led to the Article 17(2) declaration be overcome.

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB2005/000926

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 3622053	A	23-11-1971	CA 948599 A1	04-06-1974
			CH 515157 A	15-11-1971
			DE 2060583 A1	16-06-1971
			DK 129392 B	07-10-1974
			FR 2073152 A5	24-09-1971
			GB 1333438 A	10-10-1973
			JP 49033050 B	04-09-1974
			NL 7017959 A	14-06-1971
WO 2004001664	A	31-12-2003	AU 2003278236 A1	06-01-2004
			BR 0311557 A	26-04-2005
			CA 2489554 A1	31-12-2003
			WO 2004001664 A1	31-12-2003
			EP 1516283 A1	23-03-2005
US 3927806	A	23-12-1975	NONE	
US 3429310	A	25-02-1969	NONE	
GB 1044627	A	05-10-1966	GB 1044626 A	05-10-1966
			GB 1045876 A	19-10-1966
			DE 1243825 B	06-07-1967
			DE 1250055 B	
			FR 1410970 A	17-09-1965
			US 3404681 A	08-10-1968
US 3191867	A	29-06-1965	NONE	
GB 2364320	A	23-01-2002	AU 6620501 A	21-01-2002
			CA 2414118 A1	17-01-2002
			EP 1296733 A1	02-04-2003
			GB 2364321 A ,B	23-01-2002
			WO 0204056 A1	17-01-2002
			JP 2004502503 T	29-01-2004
			US 2004089292 A1	13-05-2004
US 5899200	A	04-05-1999	GB 2294506 A	01-05-1996
			AU 2747295 A	15-05-1996
			DE 69502111 D1	20-05-1998
			DE 69502111 T2	06-08-1998
			EP 0787103 A1	06-08-1997
			WO 9612661 A1	02-05-1996
DE 29818662	U1	02-03-2000	NONE	
US 4940051	A	10-07-1990	FI 834816 A	29-06-1985
			AT 29966 T	15-10-1987
			AU 569774 B2	18-02-1988
			AU 3832485 A	12-07-1985
			DE 3466478 D1	05-11-1987
			DK 354285 A	02-08-1985
			EP 0167581 A1	15-01-1986
			WO 8502778 A1	04-07-1985
			JP 61500831 T	01-05-1986
			NO 853339 A ,B,	26-09-1985
WO 2004064906	A	05-08-2004	US 2004139964 A1	22-07-2004
			WO 2004064906 A1	05-08-2004

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB2005/000926

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4641644	A	10-02-1987	SE 433443 B 28-05-1984
			AT 12353 T 15-04-1985
			AU 550712 B2 10-04-1986
			AU 8818682 A 22-03-1984
			CA 1181643 A1 29-01-1985
			CY 1387 A 18-12-1987
			DE 3262782 D1 02-05-1985
			DK 409082 A 16-03-1983
			EP 0074937 A1 23-03-1983
			ES 274773 U 01-02-1984
			FI 823121 A ,B, 16-03-1983
			GR 77340 A1 11-09-1984
			HK 68687 A 02-10-1987
			IE 53135 B1 06-07-1988
			JP 1058992 B 14-12-1989
			JP 1573889 C 20-08-1990
			JP 58061756 A 12-04-1983
			MY 35986 A 31-12-1986
			NO 822608 A ,B, 16-03-1983
			NZ 201878 A 12-07-1985
			PH 19905 A 13-08-1986
			PT 75558 A ,B 01-10-1982
			SE 8105487 A 16-03-1983
			SG 46487 G 04-03-1988
			ZA 8204880 A 27-04-1983
WO 9938555	A	05-08-1999	DE 19825434 A1 05-08-1999
			AT 249854 T 15-10-2003
			AU 742962 B2 17-01-2002
			AU 2510599 A 16-08-1999
			BR 9814928 A 17-10-2000
			CA 2319026 A1 05-08-1999
			CN 1130234 C 10-12-2003
			WO 9938555 A1 05-08-1999
			DE 59809670 D1 23-10-2003
			DK 1051212 T3 20-10-2003
			EP 1051212 A1 15-11-2000
			ES 2207030 T3 16-05-2004
			HK 1034475 A1 06-02-2004
			HR 20000510 A1 28-02-2001
			HU 0100645 A2 28-06-2001
			IL 137556 A 31-08-2004
			JP 2002501791 T 22-01-2002
			NO 20003847 A 02-10-2000
			NZ 506050 A 25-10-2002
			PL 342031 A1 21-05-2001
			PT 1051212 T 31-12-2003
			SI 20363 A 30-04-2001
			SK 11182000 A3 12-02-2001
			TR 200002005 T2 21-11-2000
			US 6752147 B1 22-06-2004
			ZA 9900342 A 19-05-1999
WO 2004089782	A	21-10-2004	WO 2004089782 A2 21-10-2004
WO 2005046774	A	26-05-2005	WO 2005046774 A1 26-05-2005
US 3549055	A	22-12-1970	BE 717578 A 16-12-1968

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB2005/000926

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 3549055	A		DE 6608621 U	30-09-1971
			DK 117279 B	06-04-1970
			FR 1571859 A	20-06-1969
			GB 1188003 A	15-04-1970
			SE 341788 B	17-01-1972
<hr/>				
WO 9106333	A	16-05-1991	AT 109667 T	15-08-1994
			AU 6617390 A	31-05-1991
			CN 1051304 A ,C	15-05-1991
			DE 69011528 D1	15-09-1994
			DE 69011528 T2	01-12-1994
			WO 9106333 A1	16-05-1991
			DK 499613 T3	02-01-1995
			EP 0499613 A1	26-08-1992
			ES 2058937 T3	01-11-1994
			HR 930363 A1	30-06-1996
			IE 903918 A1	08-05-1991
			IL 96195 A	26-08-1994
			JP 2856549 B2	10-02-1999
			JP 5501370 T	18-03-1993
			NZ 235917 A	28-04-1993
			PL 287574 A1	13-01-1992
			PT 95764 A ,B	30-06-1993
			RU 2091088 C1	27-09-1997
			US 5542411 A	06-08-1996
			ZA 9008598 A	31-07-1991
<hr/>				
US 3826413	A	30-07-1974	GB 1392192 A	30-04-1975
			AR 193533 A1	30-04-1973
			AT 335047 B	25-02-1977
			AT 604272 A	15-06-1976
			AU 4469672 A	24-01-1974
			BE 786421 A1	16-11-1972
			CA 961458 A1	21-01-1975
			CH 555681 A	15-11-1974
			CS 164928 B2	28-11-1975
			DE 2235247 A1	01-02-1973
			DK 136018 B	01-08-1977
			EG 10691 A	30-04-1976
			ES 404952 A1	16-06-1975
			FR 2146261 A1	02-03-1973
			HU 168483 B	28-05-1976
			IE 36534 B1	24-11-1976
			IL 39916 A	29-11-1974
			IT 965914 B	11-02-1974
			NL 7209897 A	23-01-1973
			NO 134730 B	30-08-1976
			NO 134730 A	
			PH 9864 A	11-05-1976
			PL 85732 B1	30-04-1976
			SE 383101 B	01-03-1976
			ZA 7204383 A	27-02-1974
<hr/>				
WO 9706842	A	27-02-1997	AU 707525 B2	15-07-1999
			AU 6750396 A	12-03-1997
			CA 2229666 A1	27-02-1997
			CN 1193283 A	16-09-1998
			EP 0846011 A1	10-06-1998

# INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/GB2005/000926

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9706842	A	WO 9706842 A1	27-02-1997
		GB 2319485 A ,B	27-05-1998
		JP 11514254 T	07-12-1999
		US 6145703 A	14-11-2000
<hr/>			